

Schedules of Provisions of the IAEA Regulations for the Safe Transport of Radioactive Material (2018 Edition)

Status: Approved by TRANSSC 36

SPESS STEP 8: Soliciting comments by
Member States

DS506

TABLE OF CONTENTS

DRAFT

1. INTRODUCTION

BACKGROUND

1.1. The Regulations for the Safe Transport of Radioactive Material (IAEA Safety Standards Series No. SSR-6, 2018 Edition) [1], henceforth called ‘the Regulations’, establish standards of safety that provide an acceptable level of control of the radiation, criticality and thermal hazards to persons, property and the environment that are associated with the transport of radioactive material. Protection from harmful effects of radiation during the transport of radioactive material is achieved by means of a combination of limitations on the contents of a package according to the quantity and type of radioactivity, the package design, and certain simple handling, storage and stowage precautions that are to be followed during transport.

1.2. While some provisions of the Regulations concern administrative controls (e.g. the requirement for the carrier to apply segregation to limit the radiation level in occupied areas), the main reliance is placed on provisions relating to the package, the responsibility for which rests primarily with the consignor of the package.

1.3. The Regulations are structured topically in terms of definitions, general provisions, activity limits and classification, requirements and controls for transport, requirements for radioactive materials and for packagings and packages, test procedures, and approval and administrative requirements.

1.4. The Regulations are supplemented by Safety Guides that provide recommendations on meeting the requirements of the Regulations.

1.5. This Safety Guide is prepared on the basis of the Regulations. It reproduces certain parts of the Regulations in a user friendly format for specified types of consignments, classified according to their associated UN numbers, but does not contain any additional requirements. Details, in particular of design, construction and testing of packagings, are omitted.

1.6. Although much of the information may not apply, a user desiring to transport a particular type of consignment of radioactive material would need to study and assimilate requirements from all sections of the Regulations. This Safety Guide aims to aid such users by providing a consolidation of certain requirements of the Regulations for each type of radioactive material, package or shipment. Once a consignor has properly classified the radioactive material to be shipped (following the recommendations provided in Section 2 and Fig. 1, on p. X), the appropriate UN number can be assigned and the specific requirements for shipment can be found in the corresponding schedule. References are provided so that the Regulations can be readily consulted when necessary.

1.7. In order to reflect the mandatory status of the Regulations and to comply with the IAEA requirements on the preparation of Safety Guides, and without diluting their status, the word “shall” in the Regulations, where it needs to be reflected in this Safety Guide, has been replaced by the words “is required to” or “requirements apply”, while the phrase “shall not” in the Regulations has been replaced by the words “is not allowed”. In the event of a conflict or anomaly between the provisions of the Regulations and this Safety Guide, the requirements in

the Regulations apply. For regulatory purposes, reference should be made to the detailed provisions of the Regulations.

OBJECTIVE

1.8. The objective of this Safety Guide is to provide information to aid users in determining the correct package type and the appropriate operational and administrative requirements to be applied.

SCOPE

1.9. This Safety Guide can be used for all transport of radioactive material. It contains 26 schedules corresponding to the UN numbers and associated proper shipping names for the radioactive material to be shipped.

1.10. The user's attention is drawn to the fact that there may be deviations (i.e. exceptions and additions) from the Regulations necessitated by national and modal regulations and carrier restrictions, which are not reflected in this Safety Guide.

STRUCTURE

1.11. Section 2 describes how the material is to be classified and assigned to the appropriate UN number with the associated proper shipping name. The Safety Guide further contains 26 schedules corresponding to the number of UN numbers and associated proper shipping names for the radioactive material to be shipped.

1.12. The schedules are set out in numerical order according to the UN number. The information provided in each schedule follows the sequence of the work involved in transporting radioactive material.

1.13. Each schedule has the same eight subjects:

- (1) General provisions;
- (2) Contents limits for packages;
- (3) Contamination;
- (4) Maximum radiation levels;
- (5) Categories of packages and overpacks;
- (6) Marking and labelling;
- (7) Requirements before shipment;
- (8) Provisions concerning transport operations.

2. DEFINITIONS AND CLASSIFICATION

2.1. This section defines terms that are necessary for the purposes of this Safety Guide and describes how radioactive material should be classified and assigned the appropriate UN number and associated proper shipping name.

DEFINITIONS

2.2. The following definitions are taken from the Regulations and reproduced here for the convenience of the user.

Contamination

Contamination shall mean the presence of a radioactive substance on a surface in quantities in excess of 0.4 Bq/cm² for beta and gamma emitters and *low toxicity alpha emitters*, or 0.04 Bq/cm² for all other alpha emitters.

Exclusive use

Exclusive use shall mean the sole use, by a single consignor, of a conveyance or of a large freight container, in respect of which all initial, intermediate and final loading and unloading and shipment are carried out in accordance with the directions of the consignor or consignee, where so required by the Regulations.

Fissile nuclides and fissile material

Fissile nuclides shall mean uranium-233, uranium-235, plutonium-239 and plutonium-241. *Fissile material* shall mean a material containing any of these *fissile nuclides*. Excluded from the definition of *fissile material* are the following:

- (a) Natural uranium or depleted uranium that is unirradiated;
- (b) Natural uranium or depleted uranium that has been irradiated in thermal reactors only;
- (c) Material with *fissile nuclides* less than a total of 0.25 g;
- (d) Any combination of (a), (b) and (c).

These exclusions are only valid if there is no other material with *fissile nuclides* in the *package* or in the consignment if shipped unpackaged.

Low dispersible radioactive material

Low dispersible radioactive material shall mean either a solid *radioactive material* or a solid *radioactive material* in a sealed capsule that has limited dispersibility and is not in powder form.

Low specific activity material

Low specific activity (LSA) material shall mean *radioactive material* that by its nature has a limited specific activity, or *radioactive material* for which limits of estimated average specific activity apply. External shielding materials surrounding the *LSA material* shall not be considered in determining the estimated average specific activity.

Low toxicity alpha emitters

Low toxicity alpha emitters are: natural uranium, depleted uranium, natural thorium, uranium-235, uranium-238, thorium-232, thorium-228 and thorium-230 when contained in ores or physical and chemical concentrates; or alpha emitters with a half-life of less than 10 days.

Package

Package shall mean the complete product of the packing operation, consisting of the packaging and its contents prepared for transport. The types of *packages* covered by the Regulations that are subject to the activity limits and material restrictions of Section IV of the Regulations and meet the corresponding requirements are:

- (i) Excepted *package*;
- (ii) Industrial *package* Type 1 (Type IP-1);
- (iii) Industrial *package* Type 2 (Type IP-2);
- (iv) Industrial *package* Type 3 (Type IP-3);
- (v) Type A *package*;
- (vi) Type B(U) *package*;
- (vii) Type B(M) *package*;
- (viii) Type C *package*.

Packages containing *fissile material* or uranium hexafluoride are subject to additional requirements.

Radioactive material

Radioactive material shall mean any material containing radionuclides where both the activity concentration and the total activity in the consignment exceed the values specified in paras 402–407 of the Regulations.

Special form radioactive material

Special form radioactive material shall mean either an indispersible solid *radioactive material* or a sealed capsule containing *radioactive material*.

Surface contaminated object

Surface contaminated object (SCO) shall mean a solid object that is not itself radioactive but which has *radioactive material* distributed on its surface.

Unilateral approval

Unilateral approval shall mean an approval of a design that is required to be given by the competent authority of the country of origin of the design only.

CLASSIFICATION

2.3. Radioactive material is required to be assigned one of the UN numbers specified in Table 1. The UN number assigned depends on the activity level of the radionuclides contained in the package, the fissile or non-fissile properties of these radionuclides, the type of package, and the nature or form of the radioactive contents of the package, or special arrangements governing the transport operation.

2.4. In all cases of international transport of packages requiring approval of design or shipment by the competent authority for which different approval types apply in the different countries concerned by the shipment, the UN number, proper shipping name, categorization, labelling and marking are required to be in accordance with the certificate of the country of origin of the design.

2.5. A flow diagram for classification of radioactive material to the appropriate UN number is provided in Fig. 1 to aid the assignment process. The objective of the flow diagram is not to indicate all possible options allowed by the regulations, nor to incorporate all of the detailed requirements and limits. Rather, it has to be seen as a tool to indicate the most suitable or optimized option for classification.

2.6. It is clear that it has to be verified that all of the requirements, limitations and prescriptions related to the UN number assigned can be complied with. If not, an alternative UN number will need to be assigned.

2.7. It is possible that for specific cases more than one UN number may be appropriate. In such cases, the choice of UN number would be left to the operator or consignor. Two examples of such situations are set out in the following:


- (1) Some radioactive material may meet the criteria for both “limited quantity” and “LSA or SCO”. If the radioactive material is not fissile, following the route of the diagram — and assuming the material is not empty packaging, manufactured uranium or thorium, or enclosed in or included as a component part of an instrument or article — the first decision box encountered is “limited quantity”. If this option is selected, the material could be classified as UN 2910 RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — LIMITED QUANTITY OF MATERIAL. This option has minimal administrative burden and requirements for the package but the activity of such an excepted package is required to be very low. However, this is not the only option for the package. Rather, the choice may be made to proceed to the decision box “LSA or SCO”. The material will now be classified as LSA or SCO (depending on the case) and can be shipped unpackaged in a larger amount as LSA-I or SCO-I without the restriction on the activity limit that is a requirement for excepted packages. However, the option “LSA or SCO” may incur a higher administrative burden that will need to be considered.
- (2) If the amount of LSA material is such that the radiation level at 3 m from the unshielded material exceeds 10 mSv/h, then the consignor has the choice of limiting the amount of LSA material per package accordingly and classifying the package as an industrial package (IP), or using a Type B package, and assigning the appropriate UN number according to the choice made.

DRAFT

TABLE 1. UN NUMBERS AND RELATED PARAGRAPH NUMBERS OF THE REGULATIONS (2012 EDITION)

UN No.	PROPER SHIPPING NAME and description	Paragraphs in which contents limits and basic requirements are established
EXCEPTED PACKAGES		
2908	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — EMPTY PACKAGING	417, 427, 515, 516
2909	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — ARTICLES MANUFACTURED FROM NATURAL URANIUM or DEPLETED URANIUM or NATURAL THORIUM	426, 516
2910	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — LIMITED QUANTITY OF MATERIAL	417, 424, 515, 516
2911	RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — INSTRUMENTS or ARTICLES	417, 423, 515, 516
3507	URANIUM HEXAFLUORIDE, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE, less than 0.1 kg per package, non-fissile or fissile-excepted	417, 425, 516
LOW SPECIFIC ACTIVITY (LSA) MATERIAL		
2912	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I), non-fissile or fissile-excepted	409(a), 411, 417
3321	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), non-fissile or fissile-excepted	409(b), 410, 411, 417
3322	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), non-fissile or fissile-excepted	409(c), 410, 411, 417
3324	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), FISSILE	409(b), 410, 411, 417, 418
3325	RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), FISSILE	409(c), 410, 411, 417, 418
SURFACE CONTAMINATED OBJECTS (SCOs)		
2913	RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I, SCO-II or SCO-III), non-fissile or fissile-excepted	413, 414, 417, 520
3326	RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I or SCO-II), FISSILE	413, 414, 417, 418
TYPE A PACKAGES		
2915	RADIOACTIVE MATERIAL, TYPE A PACKAGE, non-special form, non-fissile or fissile-excepted	417, 429(b), 430

UN No.	PROPER SHIPPING NAME and description	Paragraphs in which contents limits and basic requirements are established
3327	RADIOACTIVE MATERIAL, TYPE A PACKAGE, FISSILE, non-special form	417, 418, 429(b), 430
3332	RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, non-fissile or fissile-excepted	415, 417, 429(a), 430
3333	RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, FISSILE	415, 417, 418, 429(a), 430
TYPE B(U) PACKAGES		
2916	RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, non-fissile or fissile-excepted	417, 432, 433
3328	RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, FISSILE	417, 418, 431–433
TYPE B(M) PACKAGES		
2917	RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, non-fissile or fissile-excepted	417, 432, 433
3329	RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, FISSILE	417, 418, 432, 433
TYPE C PACKAGES		
3323	RADIOACTIVE MATERIAL, TYPE C PACKAGE, non-fissile or fissile-excepted	417, 432
3330	RADIOACTIVE MATERIAL, TYPE C PACKAGE, FISSILE	417, 418, 432
SPECIAL ARRANGEMENT		
2919	RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, non-fissile or fissile-excepted	310, 417
3331	RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, FISSILE	310, 417, 418
URANIUM HEXAFLUORIDE		
2977	RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILE	417–420
2978	RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, non-fissile or fissile-excepted	417, 419(b), 420

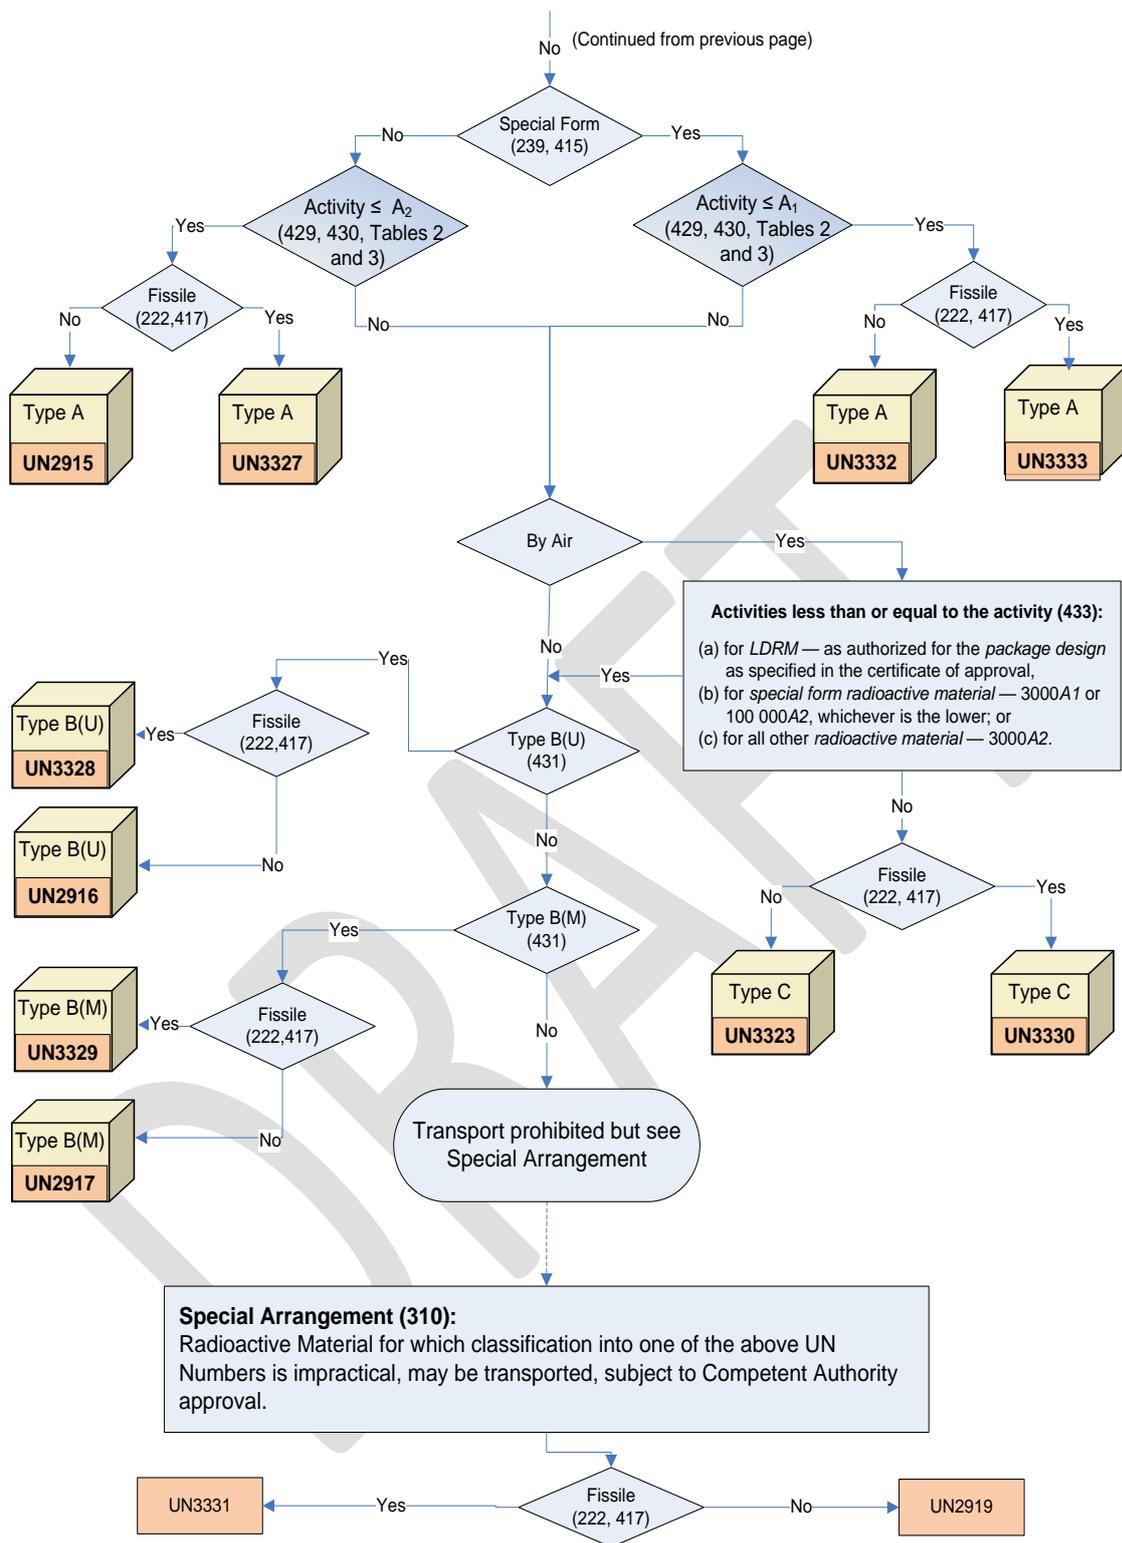

- (1) \leq ___ Less than or equal to;
- (2) A_L ___ Activity limit for an exempt consignment in Tables 2 and 3 of the Regulations;
 A_C ___ Activity concentration limit for exempt material in Tables 2 and 3 of the Regulations;
- (3) The number in () ___ The paragraph number or table of the Regulations;
- (4) Manuf U/Th ___ Articles manufactured from natural uranium or depleted uranium or natural thorium.
- (5) Fissile excepted by para. 417 (a-f) should be treated as "No"
- (6) LDRM: Low Dispersable Radioactive Material

FIG. 1. Flow diagram for the classification of radioactive material with the appropriate UN number.

SCHEDULE FOR UN 2908

RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — EMPTY PACKAGING

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305	Emergency response.
306	Management system.
311–315	Training.
502, 503	Requirements before each shipment.
515	Requirements — general. If the excepted package is contaminated with fissile material, one of the fissile exceptions provided by para. 417 is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
607–618	Design requirements for the packaging and the package.
619–621	Additional design requirements — air transport.
636	Minimum dimensions of a package containing fissile excepted material.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
	Only contamination is allowed (see below).
417	If the package is contaminated by fissile material, one of the fissile exceptions provided by para. 417 is required to be applied.
422(a), 427	Classification as an excepted package.
	3. CONTAMINATION

427(c) Non-fixed contamination on the internal surfaces is not allowed to exceed 100 times the levels specified in para. 508.

427(d) Any labels that may have been displayed in conformity with para. 538 are required to be removed or covered.

508 Non-fixed contamination on the external surfaces of any package is required to be kept as low as practicable and is not allowed to exceed the following limits, averaged over any area of 300 cm² of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;

(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

516 The radiation level at any point on the external surface of an excepted package is not allowed to exceed 5 µSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

Not applicable.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–533 All package markings are required to be legible and durable, and are required to be on the outside of the packaging.

532 Packages are required to bear the mark “UN 2908”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

581(c)–(e) A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

7. REQUIREMENTS BEFORE SHIPMENT

502, 503(a) Before each shipment of any package, the following requirements apply:

(i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.

(ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or

otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.

546(a) The transport documents with each consignment (consignment notes) are required to include the identification of the consignor and the consignee, including their names and addresses, and the UN number UN 2908.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

580 A consignment may be accepted for domestic movement by national postal authorities, subject to such additional requirements as those established in para. 580 of the Regulations and as prescribed by the authorities.

581 A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

8.2. Placarding

507, 545 Placards may be required for other dangerous properties of the contents, but not for the radioactive properties.

8.3. Stowage during transport, storage in transit and segregation

Not applicable.

8.4. Damaged or leaking packages

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

505 Tanks and intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

427(a), (b) Transport of empty packaging is subject to additional requirements.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2909

RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — ARTICLES MANUFACTURED FROM NATURAL URANIUM or DEPLETED URANIUM or NATURAL THORIUM

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305	Emergency response.
306	Management system.
311–315	Training.
502, 503	Requirements before each shipment.
515	Requirements — general.
607–618	Design requirements for the packaging and the package.
619–621	Additional design requirements — air transport.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
422(c), 426	Classification as an excepted package.
426	There is no limit on the quantity of material; the contents limits are on the type of material and on the outer surface of the material.
	3. CONTAMINATION
508	Non-fixed contamination on the external surfaces of any package is required to be kept as low as practicable and is not allowed to exceed the following limits, averaged over any area of 300 cm ² of any part of the surface: (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm ² ;

(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

516 The radiation level at any point on the external surface of an excepted package is not allowed to exceed 5 µSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

Not applicable.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or consignee, or both.

531–533 All package markings are required to be legible and durable, and are required to be on the outside of the packaging.

532 Packages are required to bear the mark “UN 2909”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

581(c)–(e) A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

7. REQUIREMENTS BEFORE SHIPMENT

502, 503(a) Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.

546(a) The transport documents with each consignment (consignment notes) are required to include the identification of the consignor and consignee, including their names and addresses, and the UN number UN 2909.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

580 A consignment may be accepted for domestic movement by national postal authorities, subject to such additional requirements as those established in para. 580 of the Regulations and as prescribed by the authorities.

581 A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents, but not for the radioactive properties.

545 Consignor's responsibilities.

8.3. Stowage during transport, storage in transit and segregation

Not applicable.

8.4 Damaged or leaking packages

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5 Decontamination

Not applicable.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2910

RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — LIMITED QUANTITY OF MATERIAL

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305	Emergency response.
306	Management system.
311–315	Training.
424(a)	Retention of contents under routine conditions of transport.
502, 503	Requirements before each shipment.
515	Requirements — general. If the excepted package contains fissile material, one of the fissile exceptions provided by para. 417 is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
607–618	Design requirements for the packaging and the package.
619–621	Additional design requirements — air transport.
636	Minimum dimensions of a package containing fissile excepted material.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
417	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

- 422(d), 424,
Table 4 The activity limits in Table 4 of the Regulations are required to be met.
- 424(b) The package is required to be marked “RADIOACTIVE” on an internal surface in such a manner that a warning of the presence of radioactive material is visible on opening the package; or on the outside of the package, when it is impractical to mark an internal surface.
- 424(c) For transport by post, the total activity in each package is not allowed to exceed one tenth of the relevant limit specified in Table 4 of the Regulations.

3. CONTAMINATION

- 508 Non-fixed contamination on the external surfaces of any package is required to be kept as low as practicable and is not allowed to exceed the following limits, averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 516 The radiation level at any point on the external surface of an excepted package is not allowed to exceed 5 µSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

Not applicable.

6. MARKING AND LABELLING

- 507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
- 531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.
- 531–533 All package markings are required to be legible and durable, and are required to be on the outside of the packaging.
- 532 Packages are required to bear the mark “UN 2910”.
- 533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
- 581(c)–(e) A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

7. REQUIREMENTS BEFORE SHIPMENT

- 502, 503(a) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.

546(a) The transport documents with each consignment (consignment notes) are required to include the identification of the consignor and consignee, including their names and addresses, and the UN number UN 2910.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

580 A consignment may be accepted for domestic movement by national postal authorities, subject to such additional requirements as those established in para. 580 of the Regulations and as prescribed by the authorities.

581 A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents, but not for the radioactive properties.

545 Consignor's responsibilities.

8.3. Stowage during transport, storage in transit and segregation

Not applicable.

8.4. Damaged or leaking packages

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

Not applicable.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2911

RADIOACTIVE MATERIAL, EXCEPTED PACKAGE — INSTRUMENTS or ARTICLES

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305	Emergency response.
306	Management system.
311–315	Training.
502, 503	Requirements before each shipment.
515	Requirements — general. If the excepted package contains fissile material, one of the fissile exceptions provided by para. 417 is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
607–618	Design requirements for the packaging and the package.
619–621	Additional design requirements — air transport.
636	Minimum dimensions of a package containing fissile excepted material.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
417	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
422(b), 423, Table 4	The activity limits in Table 4 of the Regulations are required to be met.

The active material is required to be completely enclosed by non-active components (a device performing the sole function of containing radioactive material is not allowed to be considered to be an instrument or manufactured article).

- 423(a) The radiation level at 10 cm from any point on the external surface of any unpackaged instrument or article is not allowed to exceed 0.1 mSv/h.

3. CONTAMINATION

- 508 Non-fixed contamination on the external surfaces of any package is required to be kept as low as practicable and is not allowed to exceed the following limits, averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 516 The radiation level at any point on the external surface of an excepted package is not allowed to exceed 5 µSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

Not applicable.

6. MARKING AND LABELLING

- 423(b) The instrument or article is required to be marked "RADIOACTIVE", except for radioluminescent timepieces or devices or certain consumer products as specified in para. 423(b) of the Regulations.

- 507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

- 531 Each package is required to be marked with an identification of either the consignor or consignee, or both.

- 531–533 All package markings are required to be legible and durable, and are required to be on the outside of the packaging.

- 532 Packages are required to bear the mark "UN 2911".

- 533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

- 545 It is the consignor's responsibility to comply with the requirements of marking, labelling and placarding.

- 581(c)–(e) A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

7. REQUIREMENTS BEFORE SHIPMENT

- 502, 503(a) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.

546(a) The transport documents with each consignment (consignment notes) are required to include the identification of the consignor and the consignee, including their names and addresses, and the UN number UN 2911.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

580, Table 4 A consignment may be accepted for domestic movement by national postal authorities, subject to such additional requirements as those established in para. 580 of the Regulations and as prescribed by the authorities.

581, Table 4 A consignment may be accepted for international movement by post, subject to such additional requirements as those established in para. 581 of the Regulations and as prescribed by the Acts of the Universal Postal Union.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents, but not for the radioactive properties.

545 Consignor's responsibilities.

8.3. Stowage during transport, storage in transit and segregation

Not applicable.

8.4. Damaged or leaking packages

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

Not applicable.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2912

RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I), non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirement before the first shipment.
502, 503	Requirements before each shipment.
607–618, 623	Design requirements for Type IP-1 packages.
619–621	Additional design requirements — air transport.
624	Design requirements for Type IP-2 packages (liquid contents, not under exclusive use).
626–630	Alternative design requirements for Type IP-2 packages.
636	Minimum dimensions of the package.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
409(a)	LSA-I definition and criteria.
411, 517	The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.
417	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority of each State.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

520 LSA-I, SCO-I and SCO-III may be transported unpackaged under the conditions as stated in para. 520 of the Regulations.

522 No activity limits.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over 300 cm² of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;

(b) All other alpha emitters, 0.4 Bq/cm².

514 The requirements of paras 508 and 509 of the Regulations on non-fixed contamination do not apply to the internal surfaces of a freight container, tank, intermediate bulk container or conveyance dedicated to the transport of unpackaged LSA-I material under exclusive use, for as long as it remains under exclusive use.

4. MAXIMUM RADIATION LEVELS

526–528, 575 (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.

(ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹

(iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

521, Table 5 LSA material and SCO are required to be packaged in accordance with Table 5 of the Regulations.

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both. All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 2912” and the proper shipping name “RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-I)”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

534(a) Each package that conforms to an IP-1 or IP-2 design is required to be marked with “TYPE IP-1” or “TYPE IP-2” as appropriate.

534(c) Each package that conforms to an IP-2 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.

536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

537 When the material is contained in receptacles or wrapping and is transported under exclusive use, it may be marked “RADIOACTIVE LSA-I”.

538 Any labels that do not relate to the contents are required to be removed or covered.

538, 543, Figs 2–4 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.

539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–537 of the Regulations.

540(a) The contents need to be marked on the label only as “LSA-I”.

540(b) The maximum activity of the contents is required to be marked on the label.

540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:

- (i) The radioactive contents;
- (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.
- 502, 503(a), (e) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.

- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where the consignment in a freight container or tank is unpackaged UN 2912 LSA-I only, or where an exclusive use consignment in a freight container is packaged UN 2912 LSA-I only, and no other UN number commodities are present in the freight container, the UN number “UN 2912” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7 For carriage in or on a road or rail vehicle, where either the consignment is unpackaged UN 2912 LSA-I only, or where an exclusive use consignment is packaged UN 2912 LSA-I only, and no other UN number commodities are present, the UN number “UN 2912” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the

Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a) For consignments of LSA-I material there is no limit on the total sum of TIs for packages, overpacks and freight containers aboard a single conveyance.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

- 505 Tanks and intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.
- 512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

514 A freight container, intermediate bulk container or conveyance dedicated to the transport of unpackaged LSA-I or SCO-I material under exclusive use may be excepted from the requirements specified in paras 509 and 513 of the Regulations solely with regard to its internal surfaces and only for as long as it remains under that specific exclusive use.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2913

RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I, SCO-II or SCO-III), non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirement before the first shipment.
502, 503(a)	Requirements before each shipment.
607–618, 623	Design requirements for the packaging and the package, Type IP-1.
619–621	Additional design requirements — air transport.
624	Design requirements for the packaging and the package, Type IP-2.
626–630	Alternative design requirements for Type IP-2 packages.
636	Minimum dimensions of the package.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
413	SCO-I, II and III definition and criteria.
414, 517	The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.
417	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

520 LSA-I, SCO-I and SCO-III may be transported unpackaged under the conditions as stated in para. 520 of the Regulations.

522 Activity limits.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

514 The requirements of paras 508 and 509 of the Regulations on non-fixed contamination do not apply to the internal surfaces of a freight container, tank, intermediate bulk container or conveyance dedicated to the transport of unpackaged SCO-I material under exclusive use, for as long as it remains under exclusive use.

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

521, Table 5 LSA material and SCO are required to be packaged in accordance with Table 5 of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–534	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 2913” and the proper shipping name, either “RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I)” or “RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-II)”, depending on the contents.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(a)	Each package that conforms to an IP-1 or IP-2 design is required to be marked with “TYPE IP-1” or “TYPE IP-2” as appropriate.
534(c)	Each package that conforms to an IP-2 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
537	When the material is contained in receptacles or wrapping and is transported under exclusive use, it may be marked “RADIOACTIVE SCO-I”.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–537 of the Regulations.

- 540(a) Each label is required to be marked with the name(s) of the radionuclide(s), followed by either “SCO-I” or “SCO-II”, as applicable. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
- 540(b) The maximum activity of the contents is required to be marked on the label.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
- 7. REQUIREMENTS BEFORE SHIPMENT**
- 501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.
- 502, 503(a) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 825(d), (e) (i) Radiation protection programmes for shipments by special use vessels.
(ii) The shipment of SCO-III.
- 826 Competent authority authorization of transport without shipment approval.
- 827A Information to be included in an application for shipment of SCO-III approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.
- ### 8.2. Placarding
- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6	As an alternative to the use of placards on large freight containers, enlarged labels are permitted.
544, Figs 6, 7	Where the consignment in the freight container is unpackaged SCO-I only, or where an exclusive use consignment in a freight container is packaged UN 2913 SCO-I or SCO-II, and no other UN number commodities are present, the UN number “UN 2913” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
545	Consignor’s responsibilities.
571, Figs 2–4, 6	The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
572, Figs 6, 7	Where the consignment in or on a road or rail vehicle is unpackaged UN 2913 SCO-I only, or where an exclusive use consignment is packaged UN 2913 SCO-I or SCO-II only, and no other UN number commodities are present, the UN number “UN 2913” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
8.3. Stowage during transport, storage in transit and segregation	
562	Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
562(a)	Criteria for segregation from workers in regularly occupied working areas.
562(b)	Criteria for segregation from members of the public.
562(c)	Criteria for segregation from undeveloped photographic film.
562(d), 506	Criteria for segregation from other dangerous goods.
563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.

566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.

567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.

576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

505 Intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

514 A freight container, intermediate bulk container or conveyance dedicated to the transport of unpackaged LSA-I or SCO-I material under exclusive use may be excepted from the requirements specified in paras 509 and 513 of the Regulations solely with regard to its internal surfaces and only for as long as it remains under that specific exclusive use.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2915

RADIOACTIVE MATERIAL, TYPE A PACKAGE, non-special form, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirements before the first shipment.
502, 503(a)	Requirements before each shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
635	Design requirements for Type A packages, summary.
636–648	Additional design requirements for Type A packages.
649, 650	Additional design requirements for packages containing liquids.
651	Additional design requirements for packages containing gases.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
417	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

429(b), 430 The quantity of radioactive material is not allowed to exceed the limits specified in paras 429(b) and 430 of the Regulations.

When special form radioactive material and non-special form radioactive material are packed in the same Type A package, the quantity of radioactive material is not allowed to exceed the limits specified in para. 430 of the Regulations. In that case, the schedule for UN 3332 is also applicable.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–534	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 2915” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE A PACKAGE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(b)	Each package is required to be marked with “TYPE A”.
534(c)	Each package is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of the design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI, except for category I-WHITE, for which the TI is not required. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
540(c)	<p>Except for mixed loads, each label on a freight container or overpack is required to be marked with:</p> <ul style="list-style-type: none"> (i) The radioactive contents; (ii) The maximum activity of the total radioactive contents during transport. <p>For mixed loads, such entries may read “See Transport Documents”.</p>
545	It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.
- 502, 503(a) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.

8.2. Placarding

- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 2915 Type A packages only, and no other UN number commodities are present, the UN number “UN 2915” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 2915 Type A packages only, and no other UN number commodities are present, the UN number “UN 2915” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

- 512 Periodic checking of conveyances and equipment is required to determine the level of contamination.
- 513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

- 309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 2916

RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a), (b)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
652	Design requirements for Type B(U) packages, summary.
602–604	Design requirements for special form radioactive material.
605	Design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–666	Additional design requirements for Type B packages.
802(a), 808–810	Package design requirements — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
823	Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990), 1996 Edition, 1996 Edition

(Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

432, 433 The quantity of radioactive material is not allowed to exceed the limits specified in paras 432 and 433 of the Regulations.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having additional dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–533, 535 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 2916” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

535 Each package is required to be marked with:

(a) The identification mark allocated to that design by the competent authority;

(b) A serial number to uniquely identify each packaging that conforms to that design;

(c) “TYPE B(U)”.

536, Fig. 1 The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.

536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

538 Any labels that do not relate to the contents are required to be removed or covered.

538, 543, Figs 2–4 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.

539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank, and are not allowed to cover the markings specified in paras 531–536 of the Regulations.

540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
540(c)	<p>Except for mixed loads, each label on a freight container or overpack is required to be marked with:</p> <ul style="list-style-type: none"> (i) The radioactive contents; (ii) The maximum activity of the total radioactive contents during transport. <p>For mixed loads, such entries may read “See Transport Documents”.</p>
545	It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
	7. REQUIREMENTS BEFORE SHIPMENT
501(a), (b)	Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics and confinement system conform to the approved design.
502, 503(a)–(c), (e)	<p>Before each shipment of any package, the following requirements apply:</p> <ul style="list-style-type: none"> (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied. (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations. (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied. (iv) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval. (v) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made. (vi) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
546	Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
547–553	The consignor is required to include a declaration in the transport documents.
554, 555	The consignor is required to provide a statement regarding actions to be taken by the carrier.

556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.

558(b) For each shipment containing radioactive material with an activity greater than $3000A_1$ or $3000A_2$, as appropriate, or 1000 TBq, whichever is the lower, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.

559 The notification referred to in para. 558 of the Regulations is required to include:

- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
- (b) The date of shipment, the expected date of arrival and the proposed routing;
- (c) The names of the radioactive materials or nuclides;
- (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
- (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations).

825(d) Radiation protection programmes for shipments by special use vessels.

826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

433 Conditions for air transport.

573 For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:

- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
- (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point

on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.

- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is exempted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 2916 Type B(U) packages only, and no other UN number commodities are present, the UN number “UN 2916” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7

Where an exclusive use consignment in or on a road or rail vehicle is UN 2916 Type B(U) packages only, and no other UN number commodities are present, the UN number “UN 2916” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.

562(a) Criteria for segregation from workers in regularly occupied working areas.

562(b) Criteria for segregation from members of the public.

562(c) Criteria for segregation from undeveloped photographic film.

562(d), 506 Criteria for segregation from other dangerous goods.

563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.

564 Consignments are required to be securely stowed.

565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.

566(a), Table 10 TI limits for freight containers and conveyances.

566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.

567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.

576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 2917

RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a), (b)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
605	Design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–666	Additional design requirements for Type B packages.
667	Design requirements for Type B(M) packages, summary and exceptions.
802(a), 811–813	Package design requirements — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
823	Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition

(Revised), 1996 (As amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

432, 433 The quantity of radioactive material is not allowed to exceed the limits specified in paras 432 and 433 of the Regulations.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–533, 535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 2917” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
535	Each package is required to be marked with: <ul style="list-style-type: none"> (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design; (c) “TYPE B(M)”.
536, Fig. 1	The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.

- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
7. REQUIREMENTS BEFORE SHIPMENT
- 501(a), (b) Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics and confinement system conform to the approved design.
- 502, 503(a)–(c), (e) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
 - (iv) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
 - (v) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
 - (vi) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558(c) For each shipment, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routeing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations).
- 560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 827 of the Regulations).
- 825(a), (b) Shipments — competent authority approval.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.
- 828 When a shipment has been approved, the competent authority is required to issue an approval certificate.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 433 Conditions for air transport.
- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;

- (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
- (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 2917 Type B(M) packages only, and no other UN number commodities are present, the UN number “UN 2917” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545	Consignor's responsibilities.
571, Figs 2–4, 6	The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
572, Figs 6, 7	Where an exclusive use consignment in or on a road or rail vehicle is UN 2917 Type B(M) packages only, and no other UN number commodities are present, the UN number "UN 2917" is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
8.3. Stowage during transport, storage in transit and segregation	
562	Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
562(a)	Criteria for segregation from workers in regularly occupied working areas.
562(b)	Criteria for segregation from members of the public.
562(c)	Criteria for segregation from undeveloped photographic film.
562(d), 506	Criteria for segregation from other dangerous goods.
563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
567	Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
8.4. Damaged or leaking packages	
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

668 Intermittent venting of Type B(M) packages may be permitted during transport under certain conditions.

SCHEDULE FOR UN 2919

RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
310	Special arrangement.
311–315	Training.
501(a), (b)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
605	Design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–666	Additional design requirements for Type B(U) packages.
667	Design requirements for Type B(M) packages, summary and exceptions.
669	Design requirements for Type C packages.
802(b)	Special arrangements — competent authority approval.

803–804 Design requirements for special form radioactive material and low dispersible radioactive material — competent authority approval.

807–813 Package design requirements — competent authority approval.

820 Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

836(j) The quantity of radioactive material is not allowed to exceed the limits given in the competent authority approval certificate.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;

(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

526–528, 575, 579 (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.

(ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when

transported under exclusive use by rail or by road, or under special arrangement by air or by sea.¹

- (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

529, 530 A package, or an overpack containing packages, transported under special arrangement is required to be assigned to category III-YELLOW, except under certain provisions stated in para. 530 of the Regulations.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

530, 532, Table 9 Except under certain provisions stated in para. 530 of the Regulations, and except in case of uranium hexafluoride where provisions in para. 419 of the Regulations apply, packages are required to bear the mark “UN 2919” and the proper shipping name “RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT”.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–533, 535 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

535 Each package is required to be marked, if appropriate, with:

- (a) The identification mark allocated to that design by the competent authority;
- (b) A serial number to uniquely identify each packaging that conforms to that design;
- (c) In the case of a Type B(U) or Type B(M) package design, with “TYPE B(U)” or “TYPE B(M)”;
- (d) In the case of a Type C package design, with “TYPE C”.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

536, Fig. 1	For Type B(U), Type B(M) or TYPE C packages, the outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
540(c)	<p>Except for mixed loads, each label on a freight container or overpack is required to be marked with:</p> <ul style="list-style-type: none"> (i) The radioactive contents; (ii) The maximum activity of the total radioactive contents during transport. <p>For mixed loads, such entries may read “See Transport Documents”.</p>
545	It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
	7. REQUIREMENTS BEFORE SHIPMENT
501(a), (b)	Before the first shipment, confirmation is required that the shielding, containment and heat transfer characteristics conform to the approved design.
502, 503(a)–(c)	<p>Before each shipment of any package, the following requirements apply:</p> <ul style="list-style-type: none"> (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied. (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 607 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 608 of the Regulations. (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied. (iv) Each Type B(U), Type B(M) and Type C package is required to be held until equilibrium conditions have been approached closely enough to

demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.

- (v) For each Type B(U), Type B(M) and Type C package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 657 and 669 of the Regulations were made.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 558(d) For each shipment, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 559 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routeing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations).
- 560 Separate notification is not required if the information has been included in the application for shipment approval.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 829–831 Approval of shipments under special arrangement.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is a UN 2919 Special Arrangement only, and no other UN number commodities are present, the UN number “UN 2919” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is a UN 2919 Special Arrangement only, and no other UN number commodities are present, the UN number “UN 2919” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 8.3. Stowage during transport, storage in transit and segregation**
- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 2977

RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Uranium hexafluoride has corrosive properties (Class 8) and these are required to be taken into account during transport.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
310	Special arrangement (fissile uranium hexafluoride transported under special arrangement).
311–315	Training.
419(c)	Classification as uranium hexafluoride.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
624–626, 635, 652, 667, 669	Uranium hexafluoride, fissile, is required to be transported, as appropriate, in: (a) Industrial packages of Type IP-2 or Type IP-3, as applicable (paras 624–626); (b) Type A packages (para. 635); (c) Type B(U) packages (para. 652); (d) Type B(M) packages (para. 667); (e) Type C packages (para. 669).
631–634	Additional requirements for packages designed to transport 0.1 kg or more of uranium hexafluoride.
673–685	Additional requirements for packages containing fissile material.

802(a), 807–813	Package design requirements — competent authority approval, as appropriate.
814–816	Approval of package designs to contain fissile material.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
824	Packaging serial numbers — informing the competent authority.
829–831	Approval of shipments under special arrangement.
	2. CONTENTS LIMITS FOR PACKAGES
417	Fissile material and exceptions.
418	Fissile material.
419	Classification for uranium hexafluoride.
420	Contents of a package containing uranium hexafluoride.
421	The quantity of uranium hexafluoride is not allowed to exceed the relevant limits specified in the Regulations, as appropriate for each type of package.
504	A package is not allowed to contain any items other than those that are necessary for the use of the uranium hexafluoride. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.
	3. CONTAMINATION
508, 509	Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm ² of any part of the surface:
	(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm ² ;
	(b) All other alpha emitters, 0.4 Bq/cm ² .
	4. MAXIMUM RADIATION LEVELS
526–528, 575	(i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) does not exceed 50, except when transported under exclusive use. (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when

transported under exclusive use by rail or by road, or under exclusive use by sea.¹

- (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

521, Table 5	Type of package.
522, Table 6	Activity limits in case of LSA-II.
523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
525, 686	CSI for packages containing fissile material, and for overpacks and freight containers.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507	<p>Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.</p> <p>Class 8 labels are also required because of the corrosive properties of the contents.</p>
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 2977” and the proper shipping name “RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, FISSILE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534	<p>Each package that conforms to:</p> <p>(a) An IP-2 or an IP-3 design is required to be marked with “TYPE IP-2” or “TYPE IP-3” as appropriate;</p> <p>(b) A Type A package design is required to be marked with “TYPE A”;</p> <p>(c) A TYPE IP-2, TYPE IP-3 or TYPE A package design is required to be marked with the international vehicle registration code (VRI Code) of the</p>

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

- country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of the design.
- 535 Each package is required to be marked with:
- (a) The identification mark allocated to that design by the competent authority;
 - (b) A serial number to uniquely identify each packaging that conforms to that design;
 - (c) In the case of a Type B(U) or Type B(M) package design, with “TYPE B(U)” or “TYPE B(M)”.
 - (d) In the case of a Type C package design, with “TYPE C”.
- 536, Fig. 1 For Type B(U), Type B(M) or Type C packages, the outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
- 536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
- 538 For all packages, any labels that do not relate to the contents are required to be removed or covered.
- 538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a), (b), (d), Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503(a)-(e) Before each shipment of any package, the following requirements apply:
- (a) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (b) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (c) For each package, it is required to ensure that all the requirements specified in the approval certificates have been satisfied.
 - (d) Each Type B(U), Type B(M) and Type C package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
 - (e) For each Type B(U), Type B(M) and Type C package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
 - (f) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558 For each shipment listed below:
- (a) Type C or Type B(U) packages containing radioactive material with an activity greater than $3000A_1$ or $3000A_2$, as appropriate, or 1000 TBq, whichever is the lower;
 - (b) Type B(M) packages;
 - (c) Shipments under special arrangement;

the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.

- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routeing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). The mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.
- 560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 822 of the Regulations).
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.
- 829–831 Approval of shipments under special arrangement.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal Requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an

open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Class 8 placards are also required because of the corrosive properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 2977 packaged fissile uranium hexafluoride only, and no other UN number commodities are present, the UN number “UN 2977” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placards shown in Fig. 6 of the Regulations against the white background, or on the placards shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 2977 packaged fissile uranium hexafluoride only, and no other UN number commodities are present, the UN number “UN 2977” is required to be displayed in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white

background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 566(c), Table 11 CSI limits for freight containers and conveyances.
- 567 Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
- 568, 569, Table 11 Segregation of packages during transport and storage in transit.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 2978

RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Uranium hexafluoride has corrosive properties (Class 8) and these are required to be taken into account during transport.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
310	Special arrangement (uranium hexafluoride transported under special arrangement).
311–315	Training.
419(c)	Classification as uranium hexafluoride.
501(a), (b)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
623–626, 635, 652, 667, 669	Uranium hexafluoride is required to be transported, as appropriate, in: (a) Industrial packages of Type IP-1, Type IP-2 or Type IP-3, as applicable (paras 623–626); (b) Type A packages (para. 635); (c) Type B(U) packages (para. 652); (d) Type B(M) packages (para. 667); (e) Type C packages (para. 669).
631–634	Additional requirements for packages designed to transport 0.1 kg or more of uranium hexafluoride.

transported under exclusive use by rail or by road, or under exclusive use by sea.¹

- (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

521, Table 5	Type of package.
522, Table 6	Activity limits in case of LSA-II.
523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
--------------	--

6. MARKING AND LABELLING

507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
-----	---

Class 8 labels are also required because of the corrosive properties of the contents.

531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
-----	---

531–535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
---------	--

532, Table 9	Packages are required to bear the mark “UN 2978” and for packages, other than excepted packages, the proper shipping name “RADIOACTIVE MATERIAL, URANIUM HEXAFLUORIDE”.
--------------	---

533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
-----	---

534	Each package that conforms to: (a) An IP-1, IP-2 or an IP-3 design is required to be marked with “TYPE IP-1, TYPE IP-2” or “TYPE IP-3” as appropriate; (b) A Type A package design is required to be marked with “TYPE A”; (c) A TYPE IP-2, TYPE IP-3 or TYPE A package design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other
-----	--

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

- identification of the packaging specified by the competent authority of the country of origin of the design.
- 535 Each package is required to be marked with:
- (a) The identification mark allocated to that design by the competent authority;
 - (b) A serial number to uniquely identify each packaging that conforms to that design;
 - (c) In the case of a Type B(U) or Type B(M) package design, with “TYPE B(U)” or “TYPE B(M)”;
 - (d) In the case of a Type C package design, with “TYPE C”.
- 536, Fig. 1 The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
- 536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
- 538 Any labels that do not relate to the contents are required to be removed or covered.
- 538, 543, Figs 2–4 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a), (b), (d),
Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
- 7. REQUIREMENTS BEFORE SHIPMENT**
- 501(a), (b) Before the first shipment, confirmation is required that the shielding, containment, and heat transfer characteristics conform to the approved design.

- 502, 503(a)–(c), (e) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (iii) For each package, it is required to ensure that all the requirements specified in the approval certificates have been satisfied.
 - (iv) Each Type B(U), Type B(M) and Type C package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
 - (v) For each Type B(U), Type B(M) and Type C package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
 - (vi) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with the consignment (consignment notes) are required to include all relevant particulars of the consignment. For excepted packages, only para. 546(c) of the Regulations is applicable.
- 547–553 The consignor is required to include a declaration in the transport documents.*
- * Not applicable to excepted packages.
- Note to Designer: Please add as footnote to bottom of the page.**
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.*
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.*
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported.* The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558 For each shipment listed below:
- (a) Type C or Type B(U) packages containing radioactive material with an activity greater than 3000A₁ or 3000A₂, as appropriate, or 1000 TBq, whichever is the lower;
 - (b) Type B(M) packages;

(c) Shipments under special arrangement;

the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.

559 The notification referred to in para. 558 of the Regulations is required to include:

- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
- (b) The date of shipment, the expected date of arrival and the proposed routing;
- (c) The names of the radioactive materials or nuclides;
- (d) Descriptions of the physical and chemical forms of the radioactive material;
- (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). The mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.

560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 827 of the Regulations).

825(d) Radiation protection programmes for shipments by special use vessels.

826 Competent authority authorization of transport without shipment approval.

827 Information to be included in an application for shipment approval.

829–831 Approval of shipments under special arrangement.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:

- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
- (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an

open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Class 8 placards are also required because of the corrosive properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 2978 packaged non-fissile or fissile-excepted uranium hexafluoride only, and no other UN number commodities are present, the UN number “UN 2978” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placards shown in Fig. 6 of the Regulations against the white background, or on the placards shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–4, Fig. 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7

Where an exclusive use consignment in or on a road or rail vehicle is UN 2978 packaged non-fissile or fissile-excepted uranium hexafluoride only, and no other UN number commodities are present, the UN number “UN 2978” is required to be displayed in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.

562(a) Criteria for segregation from workers in regularly occupied working areas.

562(b) Criteria for segregation from members of the public.

562(c) Criteria for segregation from undeveloped photographic film.

562(d), 506 Criteria for segregation from other dangerous goods.

563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.

564 Consignments are required to be securely stowed.

565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.

566(a), Table 10 TI limits for freight containers and conveyances.

566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.

567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.

576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3321

RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
522, Table 6	Activity limits.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
624	Design requirements for Type IP-2 packages.
625	Design requirements for Type IP-3 packages (LSA-II material, liquids and gases, not under exclusive use).
626–630	Alternative design requirements for Type IP-2 and Type IP-3 packages.
636	Minimum dimensions of the package.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES
409(b), 410	LSA-II definition and criteria.

	A single package of non-combustible LSA-II material, if carried by air, is not allowed to contain an activity greater than 3000A ₂ .
411, 517	The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.
417, 504	If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
504	A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.
	3. CONTAMINATION
508, 509	Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm ² of any part of the surface: (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm ² ; (b) All other alpha emitters, 0.4 Bq/cm ² .
	4. MAXIMUM RADIATION LEVELS
526–528, 575	(i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use. (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea. ¹ (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.
	5. CATEGORIES OF PACKAGES AND OVERPACKS
521, Table 5	LSA material and SCO are required to be packaged in accordance with Table 5 of the Regulations.
523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–534	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3321” and the proper shipping name “RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II)”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(a)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with “TYPE IP-2” or “TYPE IP-3” as appropriate.
534(c)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a)	Each label is required to be marked with the name(s) of the radionuclide(s), followed by “LSA-II”. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
540(b)	The maximum activity of the contents is required to be marked on the label.

540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:

- (i) The radioactive contents;
- (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.

545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.

502, 503(a), (e) Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- (iii) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.

547–553 The consignor is required to include a declaration in the transport documents.

554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.

825(d) Radiation protection programmes for shipments by special use vessels.

826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:

- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;

- (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is exempted from requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.
- 8.2. Placarding**
- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is packaged UN 3321 LSA-II only, and no other UN number commodities are present, the UN number “UN 3321” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.

- 571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 For carriage in or on a road or rail vehicle, where an exclusive use consignment is packaged UN 3321 LSA-II only, and no other UN number commodities are present, the UN number “UN 3321” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

505 Tanks and intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3322

RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
522, Table 6	Activity limits.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
624	Design requirements for Type IP-2 packages (LSA-III material, under exclusive use).
625	Design requirements for Type IP-3 packages (LSA-III material, not under exclusive use).
626, 627, 629, 630	Alternative design requirements for Type IP-2 and Type IP-3 packages.
636	Minimum dimensions of the package.
801	The consignor is required to demonstrate that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
	2. CONTENTS LIMITS FOR PACKAGES

409(c), 410	<p>LSA-III definition and criteria.</p> <p>A single package of non-combustible LSA-III material, if carried by air, is not allowed to contain an activity greater than 3000A₂.</p>						
411, 517	<p>The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.</p>						
417	<p>If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.</p> <p>Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.</p>						
504	<p>A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.</p>						
	<p>3. CONTAMINATION</p>						
508, 509	<p>Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:</p> <table border="0" style="margin-left: 40px;"> <tr> <td>(a) Beta, gamma and low toxicity alpha emitters,</td> <td style="text-align: right;">4 Bq/cm²;</td> </tr> <tr> <td>(b) All other alpha emitters,</td> <td style="text-align: right;">0.4 Bq/cm².</td> </tr> </table>	(a) Beta, gamma and low toxicity alpha emitters,	4 Bq/cm ² ;	(b) All other alpha emitters,	0.4 Bq/cm ² .		
(a) Beta, gamma and low toxicity alpha emitters,	4 Bq/cm ² ;						
(b) All other alpha emitters,	0.4 Bq/cm ² .						
	<p>4. MAXIMUM RADIATION LEVELS</p>						
526–528, 575	<table border="0" style="margin-left: 40px;"> <tr> <td>(i)</td> <td>The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.</td> </tr> <tr> <td>(ii)</td> <td>The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹</td> </tr> <tr> <td>(iii)</td> <td>The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.</td> </tr> </table>	(i)	The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.	(ii)	The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea. ¹	(iii)	The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.
(i)	The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.						
(ii)	The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea. ¹						
(iii)	The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.						
	<p>5. CATEGORIES OF PACKAGES AND OVERPACKS</p>						
521, Table 5	<p>LSA material and SCO are required to be packaged in accordance with Table 5 of the Regulations.</p>						
523, 524, 524A	<p>The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.</p>						

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–534	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3322” and the proper shipping name “RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III)”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(a)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with “TYPE IP-2” or “TYPE IP-3” as appropriate.
534(c)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a)	Each label is required to be marked with the name(s) of the radionuclide(s), followed by “LSA-III”. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
540(b)	The maximum activity of the contents is required to be marked on the label.

- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.

- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.

- 502, 503(a), (e) Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- (iii) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.

- 547–553 The consignor is required to include a declaration in the transport documents.

- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.

- 825(d) Radiation protection programmes for shipments by special use vessels.

- 826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:

- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;

- (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
- (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is packaged UN 3322 LSA-III only, and no other UN number commodities are present, the UN number “UN 3322” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

- 545 Consignor's responsibilities.
- 571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 For carriage in or on a road or rail vehicle, where an exclusive use consignment is packaged UN 3322 LSA-III only, and no other UN number commodities are present, the UN number "UN 3322" is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

505 Intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3323

RADIOACTIVE MATERIAL, TYPE C PACKAGE, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a), (b)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–657, 661–666	Additional design requirements for Type B(U) packages.
669	Design requirements for Type C packages, summary.
670–672	Design requirements for Type C packages.
802(a), 808–810	Package design requirements — competent authority approval.
823	Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.
824	Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

432 The quantity of radioactive material is not allowed to exceed the limits specified in para. 432 of the Regulations.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

6. MARKING AND LABELLING

507	Packages, freight containers and overpacks containing materials having additional dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–533, 535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3323” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE C PACKAGE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
535	Each package is required to be marked with: (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design; (c) “TYPE C”.
536, Fig. 1	The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 543, Figs 2–4	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.

- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
7. REQUIREMENTS BEFORE SHIPMENT
- 501(a), (b) Before the first shipment, confirmation is required that the shielding, containment, and heat transfer characteristics conform to the approved design.
- 502, 503(a)–(c), (e) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
 - (iv) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
 - (v) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
 - (vi) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558(a) For each shipment containing radioactive material with an activity greater than $3000A_1$ or $3000A_2$, as appropriate, or 1000 TBq, whichever is the lower, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routeing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations).
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an

open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3323 Type C packages only, and no other UN number commodities are present, the UN number “UN 3323” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7

Where an exclusive use consignment in or on a road or rail vehicle is UN 3323 Type C packages only, and no other UN number commodities are present, the UN number “UN 3323” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or part thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3324

RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
522, Table 6	Activity limits.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
624	Design requirements for Type IP-2 packages.
625	Design requirements for Type IP-3 packages (LSA-II material, liquids and gases, not under exclusive use).
626–630	Alternative design requirements for Type IP-2 and Type IP-3 packages.
636	Minimum dimensions of the package.
673–685	Additional design requirements for packages containing fissile material.
802(a), 814–816	Package design requirements — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

824	Packaging serial numbers — informing the competent authority.						
	2. CONTENTS LIMITS FOR PACKAGES						
409(b), 410	LSA-II definition and criteria. A single package of non-combustible LSA-II material, if carried by air, is not allowed to contain an activity greater than 3000A ₂ .						
411, 517	The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.						
417	Fissile material and exceptions.						
418	Fissile material.						
504	A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.						
	3. CONTAMINATION						
508, 509	Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm ² of any part of the surface: <table border="0" style="margin-left: 40px;"> <tr> <td style="padding-right: 20px;">(a) Beta, gamma and low toxicity alpha emitters,</td> <td>4 Bq/cm²;</td> </tr> <tr> <td>(b) All other alpha emitters,</td> <td>0.4 Bq/cm².</td> </tr> </table>	(a) Beta, gamma and low toxicity alpha emitters,	4 Bq/cm ² ;	(b) All other alpha emitters,	0.4 Bq/cm ² .		
(a) Beta, gamma and low toxicity alpha emitters,	4 Bq/cm ² ;						
(b) All other alpha emitters,	0.4 Bq/cm ² .						
	4. MAXIMUM RADIATION LEVELS						
526–528, 575	<table border="0" style="margin-left: 20px;"> <tr> <td style="padding-right: 10px;">(i)</td> <td>The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.</td> </tr> <tr> <td>(ii)</td> <td>The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹</td> </tr> <tr> <td>(iii)</td> <td>The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.</td> </tr> </table>	(i)	The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.	(ii)	The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea. ¹	(iii)	The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.
(i)	The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.						
(ii)	The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea. ¹						
(iii)	The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.						
	5. CATEGORIES OF PACKAGES AND OVERPACKS						
521, Table 5	LSA material and SCO is required to be packaged in accordance with Table 5 of the Regulations.						

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
525, 686	CSI for packages containing fissile material, and overpacks and freight container.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3324” and the proper shipping name “RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-II), FISSILE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(a)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with “TYPE IP-2” or “TYPE IP-3” as appropriate.
534(c)	Each package that conforms to an IP-2 or IP-3 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.
535	Each package that conforms to a competent authority approved design is required to be marked with: <ul style="list-style-type: none"> (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.

- 538, 541–543,
Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a) Each label is required to be marked with the name(s) of the radionuclide(s), followed by “LSA-II”. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
- 540(b) The maximum activity of the contents is required to be marked on the label. The mass of fissile material, in units of grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
(i) The radioactive contents;
(ii) The maximum activity of the total radioactive contents during transport.
For mixed loads, such entries may read “See Transport Documents”.
- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
- 7. REQUIREMENTS BEFORE SHIPMENT**
- 501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503(a), (d), (e) Before each shipment of any package, the following requirements apply:
(i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
(ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
(iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
(iv) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.
(v) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.

8.2. Placarding

- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
- 544, Figs 6–7 Where an exclusive use consignment in a freight container is packaged UN 3324 LSA-II only, and no other UN number commodities are present, the UN number “UN 3324” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6–7 For carriage in or on a road or rail vehicle, where an exclusive use consignment is packaged UN 3324 LSA-II only, and no other UN number commodities are present, the UN number “UN 3324” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 566(c) CSI limits for freight containers and conveyances.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 568, 569, Table 11 Segregation of packages during transport and storage in transit.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

- 505 Tanks and intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.
- 512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3325

RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
522, Table 6	Activity limits.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
624	Design requirements for Type IP-2 packages (LSA-III material, under exclusive use).
625	Design requirements for Type IP-3 packages (LSA-III material, not under exclusive use).
626, 627, 629, 630	Alternative design requirements for Type IP-2 and Type IP-3 packages.
636	Minimum dimensions of the package.
673–685	Additional design requirements for packages containing fissile material.
802(a), 814–816	Package design requirements — competent authority approval.

820 Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

409(c), 410 LSA-III definition and criteria.

A single package of non-combustible LSA-III material, if carried by air, is not allowed to contain an activity greater than $3000A_2$.

411, 517 The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.

417 Fissile material and exceptions.

418 Fissile material.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm^2 of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm^2 ;

(b) All other alpha emitters, 0.4 Bq/cm^2 .

4. MAXIMUM RADIATION LEVELS

526–528, 575 (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.

(ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h , except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹

(iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h .

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

5. CATEGORIES OF PACKAGES AND OVERPACKS

- 521, Table 5 LSA material and SCO is required to be packaged in accordance with Table 5 of the Regulations.
- 523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

525, 686 CSI for packages containing fissile material, and overpacks and freight containers.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531 – 535 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 3325” and the proper shipping name “RADIOACTIVE MATERIAL, LOW SPECIFIC ACTIVITY (LSA-III), FISSILE”

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

534(a) Each package that conforms to an IP-2 or IP-3 design is required to be marked with “TYPE IP-2” or “TYPE IP-3” as appropriate.

534(c) Each package that conforms to an IP-2 or IP-3 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.

535 Each package that conforms to a competent authority approved design is required to be marked with:

(a) The identification mark allocated to that design by the competent authority;

(b) A serial number to uniquely identify each packaging that conforms to that design.

- 536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
- 538 Any labels that do not relate to the contents are required to be removed or covered.
- 538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a) Each label is required to be marked with the name(s) of the radionuclide(s), followed by “LSA-III”. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
- 540(b) The maximum activity of the contents is required to be marked on the label. The mass of fissile material, in units of grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503(a), (d), (e) Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.

- (iv) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.
 - (v) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an

open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is packaged UN 3325 LSA-III only, and no other UN number commodities are present, the UN number “UN 3325” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7

For carriage in or on a road or rail vehicle, where an exclusive use consignment is packaged UN 3325 LSA-III only, and no other UN number commodities are present, the UN number “UN 3325” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the critical group of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 566(c) CSI limits for freight containers and conveyances.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 568, 569, Table 11 Segregation of packages during transport and storage in transit.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

505 Intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3326

RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I or SCO-II), FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
522, Table 6	Activity limits.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618, 623	Design requirements for the packaging and the package, Type IP-1.
619–621	Additional design requirements — air transport.
624	Design requirements for the packaging and the package, Type IP-2.
626–630	Alternative design requirements for Type IP-2 packages.
636	Minimum dimensions of the package.
673–685	Additional design requirements for packages containing fissile material.
802(a), 814–816	Package design requirements — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
824	Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

- 413 SCO-I and SCO-II definition and criteria.
- 414, 517 The contents are required to be restricted in accordance with the radiation levels specified in para. 517 of the Regulations.
- 417 Fissile material and exceptions.
- 418 Fissile material.
- 504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

- 508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

- 514 The requirements of paras 508 and 509 of the Regulations concerning non-fixed contamination do not apply to the internal surfaces of a freight container, tank, intermediate bulk container or conveyance dedicated to the transport of unpackaged SCO-I material under exclusive use, for as long as it remains under exclusive use.

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.
- (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
- (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

521, Table 5	LSA material and SCO are required to be packaged in accordance with Table 5 of the Regulations.
523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
525, 686	CSI for packages containing fissile material, and for overpacks and freight containers.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
	6. MARKING AND LABELLING
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3326” and the proper shipping name, either “RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-I) FISSILE” or “RADIOACTIVE MATERIAL, SURFACE CONTAMINATED OBJECTS (SCO-II) FISSILE”, depending on the contents.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(a)	Each package that conforms to an IP-1 or IP-2 design is required to be marked with “TYPE IP-1” or “TYPE IP-2” as appropriate.
534(c)	Each package that conforms to an IP-2 design is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of design.
535	Each package that conforms to a competent authority approved design is required to be marked with: <ul style="list-style-type: none"> (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

- 538 Any labels that do not relate to the contents are required to be removed or covered.
- 538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a) Each label is required to be marked with the name(s) of the radionuclide(s), followed by either “SCO-I” or “SCO-II”, as applicable. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.
- 540(b) The maximum activity of the contents is required to be marked on the label. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
(i) The radioactive contents;
(ii) The maximum activity of the total radioactive contents during transport.
For mixed loads, such entries may read “See Transport Documents”.
- 540(d) Each label is required to show the TI, except for category I-WHITE, for which the TI is not required.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
- 7. REQUIREMENTS BEFORE SHIPMENT**
- 501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503(a), (d), (e) Before each shipment of any package, the following requirements apply:
(i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
(ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
(iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
(iv) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of

each package as specified in para. 680 of the Regulations are required to be performed where applicable.

- (v) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 825(c) Shipment — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–6 As an alternative to the use of placards on large freight containers, enlarged labels are permitted.
- 544, Figs 6, 7 Where the consignment in the freight container is unpackaged SCO-I only, or where an exclusive use consignment in a freight container is packaged UN 3326 SCO-I or SCO-II only, and no other UN number commodities are present, the UN number “UN 3326” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where the consignment in or on a road or rail vehicle is unpackaged UN 3326 SCO-I only, or where an exclusive use consignment is packaged UN 3326 SCO-I or SCO-II only, and no other UN number commodities are present, the UN number “UN 3326” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 566(c) CSI limits for freight containers and conveyances.
- 567 Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
- 568, 569, Table 11 Segregation of packages during transport and storage in transit.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

- 505 Intermediate bulk containers used for the transport of radioactive material are not allowed to be used for storage or transport of other goods, unless

decontaminated below one tenth of the levels specified in paras 508 and 509 of the Regulations.

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

514 A freight container, intermediate bulk container or conveyance dedicated to the transport of unpackaged LSA-I or SCO-I material under exclusive use may be excepted from the requirements specified in paras 508, 509 and 513 of the Regulations solely with regard to its internal surfaces and only for as long as it remains under that specific exclusive use.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3327

RADIOACTIVE MATERIAL, TYPE A PACKAGE, FISSILE, non-special form

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
635	Design requirements for Type A packages, summary.
636–648	Additional design requirements for Type A packages.
649, 650	Additional design requirements for packages containing liquids.
651	Additional design requirements for packages containing gases.
673–685	Additional design requirements for packages containing fissile material.
802(a), 814–816	Package design requirements — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
824	Packaging serial numbers — informing the competent authority.
	2. CONTENTS LIMITS FOR PACKAGES

417	Fissile material and exceptions.
418	Fissile material.
429(b), 430	<p>The quantity of radioactive material is not allowed to exceed the limits specified in paras 429(b) and 430 of the Regulations.</p> <p>When special form radioactive material and non-special form radioactive material are packed in the same Type A package, the quantity of radioactive material is not allowed to exceed the limits specified in para. 430 of the Regulations. In that case, the schedule for UN 3333 is also applicable.</p>
504	A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.
	3. CONTAMINATION
508, 509	<p>Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:</p> <p>(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;</p> <p>(b) All other alpha emitters, 0.4 Bq/cm².</p>
	4. MAXIMUM RADIATION LEVELS
526–528, 575	<p>(i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.</p> <p>(ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹</p> <p>(iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.</p>
	5. CATEGORIES OF PACKAGES AND OVERPACKS
523, 524, 524A	The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

525, 686	CSI for packages containing fissile material, and for overpacks and freight containers.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3327” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE A PACKAGE, FISSILE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
534(b)	Each package is required to be marked with “TYPE A”.
534(c)	Each package is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of the design.
535	Each package that conforms to a competent authority approved design is required to be marked with: <ul style="list-style-type: none"> (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 541–543, Figs 2–5	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.

540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI, except for category I-WHITE, for which the TI is not required. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
540(c)	<p>Except for mixed loads, each label on a freight container or overpack is required to be marked with:</p> <ul style="list-style-type: none"> (i) The radioactive contents; (ii) The maximum activity of the total radioactive contents during transport. <p>For mixed loads, such entries may read “See Transport Documents”.</p>
545	It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
	7. REQUIREMENTS BEFORE SHIPMENT
501	Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
502, 503(a), (d), (e)	<p>Before each shipment of any package, the following requirements apply:</p> <ul style="list-style-type: none"> (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied. (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations. (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied. (iv) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable. (v) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
546	Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
547–553	The consignor is required to include a declaration in the transport documents.
554, 555	The consignor is required to provide a statement regarding actions to be taken by the carrier.
556	The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.

8.2. Placarding

- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3327 Type A packages only, and no other UN number commodities are present, the UN number “UN 3327” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 3327 Type A packages only, and no other UN number commodities are present, the UN number “UN 3327” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.

563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
566(c), Table 11	CSI limits for freight containers and conveyances.
567	Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
568, 569, Table 11	Segregation of packages during transport and storage in transit.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
	8.4. Damaged or leaking packages
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
511	Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.
	8.5. Decontamination
512	Periodic checking of conveyances and equipment is required to determine the level of contamination.
513	Decontamination of conveyances, equipment or parts thereof that have become contaminated.
	8.6. Other provisions
309	In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
582	Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.
583	Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3328

RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
431	Classification in case of international shipment when different approval types apply.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
605	Design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
652	Design requirements for Type B(U) packages, summary.
653–666	Additional design requirements for Type B packages.
673–685	Additional design requirements for packages containing fissile material.
802(a), 808–810, 814–816	Package design requirements — competent authority approval.

820 Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 Fissile material and exceptions.

418 Fissile material.

432, 433 The quantity of radioactive material is not allowed to exceed the limits specified in paras 432 and 433 of the Regulations.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

525, 686 CSI for packages containing fissile material, and for overpacks and freight containers.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–533, 535 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 3328” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE B(U) PACKAGE, FISSILE”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

535 Each package is required to be marked with:
(a) The identification mark allocated to that design by the competent authority;
(b) A serial number to uniquely identify each packaging that conforms to that design;
(c) “TYPE B(U)”.

536, Fig. 1 The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.

536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

538 Any labels that do not relate to the contents are required to be removed or covered.

538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.

539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.

540(a), (b), (d),
Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.

540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:

- (i) The radioactive contents;
- (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.

502, 503 Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
- (iv) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
- (v) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
- (vi) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.

(vii) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558(b) For each shipment containing radioactive material with an activity greater than $3000A_1$ or $3000A_2$, as appropriate, or 1000 TBq, whichever is the lower, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). The mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.
- 560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 827 of the Regulations).
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.

- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 433 Conditions for air transport.
- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.

8.2. Placarding

- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3328 Type B(U) packages only, and no other UN number commodities are present, the UN number “UN 3328” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 3328 Type B(U) packages only, and no other UN number commodities are present, the UN number “UN 3328” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.

565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
566(c), Table 11	CSI limits for freight containers and conveyances.
567	Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
568, 569, Table 11	Segregation of packages during transport and storage in transit.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
	8.4. Damaged or leaking packages
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
511	Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.
	8.5. Decontamination
512	Periodic checking of conveyances and equipment is required to determine the level of contamination.
513	Decontamination of conveyances, equipment or parts thereof that have become contaminated.
	8.6. Other provisions
309	In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
582	Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.
583	Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3329

RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
431	Classification in case of international shipment when different approval types apply.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
605	Design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–666	Additional design requirements for Type B packages.
667	Design requirements for Type B(M) packages, summary and exceptions.
673–685	Additional design requirements for packages containing fissile material.
802(a), 811–816	Package design requirements — competent authority approval.

820 Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 Fissile material and exceptions.

418 Fissile material.

432, 433 The quantity of radioactive material is not allowed to exceed the limits specified in paras 432 and 433 of the Regulations.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;

(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

526–528, 575 (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.

(ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹

(iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

525, 686 CSI for packages containing fissile material, and for overpacks and freight containers.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–533, 535 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 3329” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE B(M) PACKAGE, FISSILE”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

535 Each package is required to be marked with:

- (a) The identification mark allocated to that design by the competent authority;
- (b) A serial number to uniquely identify each packaging that conforms to that design;
- (c) “TYPE B(M)”.

536, Fig. 1 The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.

536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

538 Any labels that do not relate to the contents are required to be removed or covered.

538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.

- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a), (b), (d),
Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
7. REQUIREMENTS BEFORE SHIPMENT
- 501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503 Before each shipment of any package, the following requirements apply:
- (a) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (b) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (c) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
 - (d) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
 - (e) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
 - (f) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.

- (g) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553 The consignor is required to include a declaration in the transport documents.
- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558(c) For each shipment, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). The mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.
- 560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 827 of the Regulations).
- 825(a)–(c) Shipments — competent authority approval.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 433 Conditions for air transport.
- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.
- 580, 581 Transport by post is not permitted.
- ### 8.2. Placarding
- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–6	As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.
544, Figs 6, 7	Where an exclusive use consignment in a freight container is UN 3329 Type B(M) packages only, and no other UN number commodities are present, the UN number “UN 3329” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
545	Consignor’s responsibilities.
571, Figs 2–6	The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
572, Figs 6, 7	Where an exclusive use consignment in or on a road or rail vehicle is UN 3329 Type B(M) packages only, and no other UN number commodities are present, the UN number “UN 3329” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
8.3. Stowage during transport, storage in transit and segregation	
562	Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
562(a)	Criteria for segregation from workers in regularly occupied working areas.
562(b)	Criteria for segregation from members of the public.
562(c)	Criteria for segregation from undeveloped photographic film.
562(d), 506	Criteria for segregation from other dangerous goods.
563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
566(c), Table 11	CSI limits for freight containers and conveyances.

567 Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.

568, 569, Table 11 Segregation of packages during transport and storage in transit.

576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

668 Intermittent venting of Type B(M) packages may be permitted during transport under certain conditions.

SCHEDULE FOR UN 3330

RADIOACTIVE MATERIAL, TYPE C PACKAGE, FISSILE

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
431	Classification in case of international shipment when different approval types apply.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Design requirements for special form radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–657, 661–666	Additional design requirements for B(U) packages.
669	Design requirements for Type C packages, summary.
670–672	Additional design requirements for Type C packages.
673–685	Additional design requirements for packages containing fissile material.
802(a), 808–810, 814–816	Package design requirements — competent authority approval.

- 823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.
- 824 Packaging serial numbers — informing the competent authority.
2. CONTENTS LIMITS FOR PACKAGES
- 432 The quantity of radioactive material is not allowed to exceed the limits specified in para. 432 of the Regulations.
- 417 Fissile material and exceptions.
- 418 Fissile material.
- 504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.
3. CONTAMINATION
- 508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:
- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
 - (b) All other alpha emitters, 0.4 Bq/cm².
4. MAXIMUM RADIATION LEVELS
- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.
5. CATEGORIES OF PACKAGES AND OVERPACKS
- 523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

525, 686	CSI for packages containing fissile material, and for overpacks and freight containers.
529, Table 8	Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.
6. MARKING AND LABELLING	
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–533, 535	All markings are required to be legible and durable, and are required to be on the outside of the packaging.
532, Table 9	Packages are required to bear the mark “UN 3330” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE C PACKAGE, FISSILE”.
533	Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
535	Each package is required to be marked with: <ul style="list-style-type: none"> (a) The identification mark allocated to that design by the competent authority; (b) A serial number to uniquely identify each packaging that conforms to that design; (c) “TYPE C”.
536, Fig. 1	The outside of the outermost receptacle that is resistant to the effects of fire and water is required to be plainly marked by embossing, stamping, or other means resistant to the effects of fire and water, with the trefoil symbol shown in Fig. 1 of the Regulations.
536A	Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
538	Any labels that do not relate to the contents are required to be removed or covered.
538, 541–543, Figs 2–5	Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
539	The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.

540(a), (b), (d), Table 2	Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
540(c)	<p>Except for mixed loads, each label on a freight container or overpack is required to be marked with:</p> <ul style="list-style-type: none"> (i) The radioactive contents; (ii) The maximum activity of the total radioactive contents during transport. <p>For mixed loads, such entries may read “See Transport Documents”.</p>
545	It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
	7. REQUIREMENTS BEFORE SHIPMENT
501	Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
502, 503	<p>Before each shipment of any package, the following requirements apply:</p> <ul style="list-style-type: none"> (a) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied. (b) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations. (c) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied. (d) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval. (e) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made. (f) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable. (g) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
546	Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
547–553	The consignor is required to include a declaration in the transport documents.

- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 558(a) For each shipment containing radioactive material with an activity greater than $3000A_1$ or $3000A_2$, as appropriate, or 1000 TBq, whichever is the lower, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.
- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). The mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.
- 560 Separate notification is not required if the information has been included in the application for shipment approval (see para. 827 of the Regulations).
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.
- 576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.
- 579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.
- 580, 581 Transport by post is not permitted.
- 8.2. Placarding**
- 507 Placards may be required for other dangerous properties of the contents.
- 543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.
- 543 Any placards that do not relate to the contents are required to be removed.
- 543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

- 544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3330 Type C packages only, and no other UN number commodities are present, the UN number “UN 3330” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 545 Consignor’s responsibilities.
- 571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 3330 Type C packages only, and no other UN number commodities are present, the UN number “UN 3330” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.
- 8.3. Stowage during transport, storage in transit and segregation**
- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 566(c), Table 11 CSI limits for freight containers and conveyances.
- 567 Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.

568, 569, Table 11	Segregation of packages during transport and storage in transit.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
	8.4. Damaged or leaking packages
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
511	Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.
	8.5. Decontamination
512	Periodic checking of conveyances and equipment is required to determine the level of contamination.
513	Decontamination of conveyances, equipment or parts thereof that have become contaminated.
	8.6. Other provisions
309	In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
582	Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.
583	Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

SCHEDULE FOR UN 3331

RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, FISSILE

Paragraph(s) of the Regulations [1]	Subject
1. GENERAL PROVISIONS	
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
310	Special arrangement.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of package design approval certificates, and possession of instructions for (a) the proper closing of the package and (b) other preparations for shipment.
602–604	Additional design requirements for special form radioactive material.
605	Additional design requirements for low dispersible radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
636–647, 648(b)	Additional design requirements for Type A packages.
649	Additional design requirements for packages containing liquids.
653–666	Additional design requirements for Type B packages.
667	Design requirements for Type B(M) packages, summary and exceptions.
669	Design requirements for Type C packages, summary.
673–685	Additional design requirements for packages containing fissile material.
802(b)	Special arrangements — competent authority approval.

803, 804 Design requirements for special form radioactive material and low dispersible radioactive material — competent authority approval.

807–816 Package design requirements — competent authority approval.

820 Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

824 Packaging serial numbers — informing the competent authority.

2. CONTENTS LIMITS FOR PACKAGES

417 Fissile material and exceptions.

836(j), (k) The quantity of radioactive material is not allowed to exceed the limit given in the competent authority approval certificate.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;

(b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

526–528, 575, 579 (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.

(ii) The maximum radiation level at any point on any external surface of the package or overpack, except when transported under exclusive use by rail or by road is not allowed to exceed 2 mSv/h, or under special arrangement by air or by sea.¹

(iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

5. CATEGORIES OF PACKAGES AND OVERPACKS

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

- 523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
- 525, 686 The CSI for packages containing fissile material is required to be obtained in accordance with paras 528 and 529 of the Regulations.
- 529, 530 A package or an overpack containing packages, transported under special arrangement is required to be assigned to category III-YELLOW, except under certain provisions stated in para. 530 of the Regulations.

6. MARKING AND LABELLING

- 507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
- 530, 532, Table 9 Except under certain provisions stated in para. 530 of the Regulations, and except in case of uranium hexafluoride where provisions in para. 419 of the Regulations apply, packages are required to bear the mark “UN 3331” and the proper shipping name “RADIOACTIVE MATERIAL, TRANSPORTED UNDER SPECIAL ARRANGEMENT, FISSILE”.
- 531 All markings are required to be legible and durable, and are required to be on the outside of the packaging.
- 533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
- 535 Each package is required to be marked with an identification of either the consignor or the consignee, or both.
- 538 Any labels that do not relate to the contents are required to be removed or covered.
- 538, 541–543, Figs 2–5 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container or tank. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a), (b), (d), Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. For fissile materials, the mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;

- (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

501 Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.

502, 503 Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
- (iv) Each package is required to be held until equilibrium conditions have been approached closely enough to demonstrate compliance with the requirements for temperature and pressure unless an exemption from these requirements has received unilateral approval.
- (v) For each package, it is required to ensure by inspection and/or appropriate tests that all closures, valves and other openings of the containment system through which the radioactive contents might escape are properly closed and, where appropriate, sealed in the manner for which the demonstrations of compliance with the requirements of paras 659 and 671 of the Regulations were made.
- (vi) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.

546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.

547–553 The consignor is required to include a declaration in the transport documents.

554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.

556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

558(d) For each shipment, the consignor is required to notify the competent authority of each State through or into which the consignment is to be transported. This notification is required to have been received by each competent authority prior to the commencement of the shipment, and preferably at least seven days in advance. See also para. 559 of the Regulations.

- 559 The notification referred to in para. 558 of the Regulations is required to include:
- (a) Clear identification of the package, including all applicable certificate numbers and identification marks;
 - (b) The date of shipment, the expected date of arrival and the proposed routing;
 - (c) The names of the radioactive materials or nuclides;
 - (d) Descriptions of the physical and chemical forms of the radioactive material, or whether it is special form radioactive material or low dispersible radioactive material;
 - (e) The maximum activity of the radioactive contents during transport, expressed in becquerels (Bq) with the appropriate SI prefix symbol (see Annex II of the Regulations). For fissile material, the mass of fissile material in grams (g), or multiples of grams, may be used in place of activity.
- 560 Separate notification is not required if the information has been included in the application for shipment approval.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 829–831 Approval of shipments under special arrangement.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

577–579 Restrictions on transport by air are set out in paras 577–579 of the Regulations.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers and tanks are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–6 As an alternative to the use of placards on large freight containers and tanks, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is a UN 3331 Special Arrangement only, and no other UN number commodities are present, the UN number “UN 3331” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is a UN 3331 Special Arrangement only, and no other UN number commodities are present, the UN number “UN 3331” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.

562(a) Criteria for segregation from workers in regularly occupied working areas.

562(b) Criteria for segregation from members of the public.

562(c)	Criteria for segregation from undeveloped photographic film.
562(d), 506	Criteria for segregation from other dangerous goods.
563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
566(c), Table 11	CSI limits for freight containers and conveyances.
567	Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
568, 569, Table 11	Segregation of packages during transport and storage in transit.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
	8.4. Damaged or leaking packages
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
511	Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.
	8.5. Decontamination
512	Periodic checking of conveyances and equipment is required to determine the level of contamination.
513	Decontamination of conveyances, equipment or parts thereof that have become contaminated.
	8.6. Other provisions
309	In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
582	Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3332

RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
	1. GENERAL PROVISIONS
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of special form radioactive material certificates, and instructions for other preparations for shipment.
602–604	Design requirements for special form radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
635	Design requirements for Type A packages, summary.
636–648	Additional design requirements for Type A packages.
649, 650	Additional design requirements for packages containing liquids.
651	Additional design requirements for packages containing gases.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
802(a), 803, 804	Design requirements for special form radioactive material — competent authority approval.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of these Regulations.

2. CONTENTS LIMITS FOR PACKAGES

417 If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.

Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.

The quantity of radioactive material is not allowed to exceed the limits specified in paras 429(a) and 430 of the Regulations.

429(a), 430 When special form radioactive material and non-special form radioactive material are packed in the same Type A package, the quantity of radioactive material is not allowed to exceed the limits specified in para. 430 of the Regulations. In that case, the schedule for UN 2915 is also applicable.

504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.

3. CONTAMINATION

508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:

- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².

4. MAXIMUM RADIATION LEVELS

- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

5. CATEGORIES OF PACKAGES AND OVERPACKS

523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.

529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.

531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.

531–534 All markings are required to be legible and durable, and are required to be on the outside of the packaging.

532, Table 9 Packages are required to bear the mark “UN 3332” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM”.

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

534(b) Each package is required to be marked with “TYPE A”.

534(c) Each package is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of the design.

536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.

538 Any labels that do not relate to the contents are required to be removed or covered.

538, 543, Figs 2–4 Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.

539 The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.

540(a), (b), (d),
Table 2 Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI, except for category I-WHITE, for which the TI is not required. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides.

- 540(c) Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.

For mixed loads, such entries may read “See Transport Documents”.

- 545 It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

- 501(a) Before the first shipment of any package for which the design pressure exceeds 35 kPa, confirmation is required that the containment system conforms to the approved design.

- 502, 503(a), (e) Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
- (iii) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.

- 546 Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.

- 547–553 The consignor is required to include a declaration in the transport documents.

- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.

- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.

- 825(d) Radiation protection programmes for shipments by special use vessels.

- 826 Competent authority authorization of transport without shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:

- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;

- (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
- (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
- (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.

574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.

575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–4, 6 As an alternative to the use of placards on large freight containers, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3332 Type A packages only, and no other UN number commodities are present, the UN number “UN 3332” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

- 571, Figs 2–4, 6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.
- 572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 3332 Type A packages only, and no other UN number commodities are present, the UN number “UN 3332” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

- 562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.
- 562(a) Criteria for segregation from workers in regularly occupied working areas.
- 562(b) Criteria for segregation from members of the public.
- 562(c) Criteria for segregation from undeveloped photographic film.
- 562(d), 506 Criteria for segregation from other dangerous goods.
- 563 Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
- 564 Consignments are required to be securely stowed.
- 565 A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
- 566(a), Table 10 TI limits for freight containers and conveyances.
- 566(b) Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
- 567 Any package or overpack having a TI greater than 10 is required to be transported only under exclusive use.
- 576 For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.

8.4. Damaged or leaking packages

- 510 Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
- 511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

512 Periodic checking of conveyances and equipment is required to determine the level of contamination.

513 Decontamination of conveyances, equipment or parts thereof that have become contaminated.

8.6. Other provisions

309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.

582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3333

RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, FISSILE

Paragraph(s) of the Regulations [1]	Subject
1. GENERAL PROVISIONS	
110, 507	Other dangerous properties of contents and transport with other dangerous goods.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
501(a)–(c)	Requirements before the first shipment.
502, 503	Requirements before each shipment.
561	Possession of special form radioactive material certificates, and instructions for other preparations for shipment.
602–604	Design requirements for special form radioactive material.
607–618	Design requirements for all packagings and packages.
619–621	Additional design requirements — air transport.
635	Design requirements for Type A packages, summary.
636–648	Additional design requirements for Type A packages.
649, 650	Additional design requirements for packages containing liquids.
651	Additional design requirements for packages containing gases.
673–685	Additional design requirements for packages containing fissile material.
802(a), 814–816	Package design requirements — competent authority approval.
803, 804	Design requirements for special form radioactive material — competent authority approval.
820	Transitional arrangements for packages approved under the 1985 and 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.

- 823 Transitional arrangements for special form radioactive material approved under the 1985, 1985 (As Amended 1990, 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012) Editions of these Regulations.
- 824 Packaging serial numbers — informing the competent authority.
2. CONTENTS LIMITS FOR PACKAGES
- 417 Fissile material and exceptions.
- 418 Fissile material.
- 429(a), 430 The quantity of radioactive material is not allowed to exceed the limits specified in paras 429(a) and 430 of the Regulations.
- When special form radioactive material and non-special form radioactive material are packed in the same Type A package, the quantity of radioactive material is not allowed to exceed the limits specified in para. 430 of the Regulations. In that case, the schedule for UN 3327 is also applicable.
- 504 A package is not allowed to contain any items other than those that are necessary for the use of the radioactive material. The interaction between these items and the package, under the conditions of transport applicable to the design, is not allowed to reduce the safety of the package.
3. CONTAMINATION
- 508, 509 Non-fixed contamination on the external surfaces of any package and on the external and internal surfaces of overpacks, freight containers, tanks, intermediate bulk containers and conveyances is required to be kept as low as practicable and is not allowed to exceed the following limits, when averaged over any area of 300 cm² of any part of the surface:
- (a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;
- (b) All other alpha emitters, 0.4 Bq/cm².
4. MAXIMUM RADIATION LEVELS
- 526–528, 575
- (i) The radiation level for a package or overpack is required to be such that the transport index (TI) of the package or overpack does not exceed 10, and the criticality safety index (CSI) is not allowed to exceed 50, except when transported under exclusive use.
 - (ii) The maximum radiation level at any point on any external surface of the package or overpack is not allowed to exceed 2 mSv/h, except when transported under exclusive use by rail or by road, or under exclusive use by sea.¹
 - (iii) The maximum radiation level at any point on any external surface of a package or overpack transported under exclusive use is not allowed to exceed 10 mSv/h.

¹ Packages or overpacks having a surface radiation level greater than 2 mSv/h carried in or on a vehicle under exclusive use may be transported by vessels in accordance with Table 10 of the Regulations, footnote (a), provided that such packages or overpacks are not removed from the vehicle at any time while on board the vessel.

5. CATEGORIES OF PACKAGES AND OVERPACKS

- 523, 524, 524A The TI is required to be derived in accordance with the procedure as stated in paras 523, 524 and 524A of the Regulations.
- 525, 686 CSI for packages containing fissile material, and for overpacks and freight containers.
- 529, Table 8 Packages and overpacks are required to be assigned to category I-WHITE, category II-YELLOW or category III-YELLOW.

6. MARKING AND LABELLING

- 507 Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
- 531 Each package is required to be marked with an identification of either the consignor or the consignee, or both.
- 531–534 All markings are required to be legible and durable, and are required to be on the outside of the packaging.
- 532, Table 9 Packages are required to bear the mark “UN 3333” and the proper shipping name “RADIOACTIVE MATERIAL, TYPE A PACKAGE, SPECIAL FORM, FISSILE”.
- 533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.
- 534(b) Each package is required to be marked with “TYPE A”.
- 534(c) Each package is required to be marked with the international vehicle registration code (VRI Code) of the country of origin of design and either the name of the manufacturer or other identification of the packaging specified by the competent authority of the country of origin of the design.
- 535 Each package that conforms to a competent authority approved design is required to be marked with:
- (a) The identification mark allocated to that design by the competent authority;
 - (b) A serial number to uniquely identify each packaging that conforms to that design.
- 536A Any mark that does not relate to the UN number and proper shipping name assigned to the consignment is required to be removed or covered.
- 538 Any labels that do not relate to the contents are required to be removed or covered.

- 538, 541–543,
Figs 2–5
- Each package, overpack and freight container is required to bear the appropriate labels. Paragraph 543 of the Regulations sets out alternative provisions for large freight containers and tanks.
- 539
- The labels are required to be fixed to two opposite sides of the outside of the package or overpack, or on all four sides of a freight container. The labels are not allowed to cover the markings specified in paras 531–536 of the Regulations.
- 540(a), (b), (d),
Table 2
- Each label is required to be marked with the name(s) of the radionuclide(s), the maximum activity of the contents and the TI, except for category I-WHITE, for which the TI is not required. Paragraph 540(a) of the Regulations also establishes requirements for labelling mixtures of radionuclides. The mass of fissile material, in grams (g), or multiples of grams, may be used instead of the activity.
- 540(c)
- Except for mixed loads, each label on a freight container or overpack is required to be marked with:
- (i) The radioactive contents;
 - (ii) The maximum activity of the total radioactive contents during transport.
- For mixed loads, such entries may read “See Transport Documents”.
- 545
- It is the consignor’s responsibility to comply with the requirements of marking, labelling and placarding.
7. REQUIREMENTS BEFORE SHIPMENT
- 501
- Before the first shipment, confirmation is required that the shielding, containment, heat transfer characteristics, confinement system and neutron poisons conform to the approved design.
- 502, 503(a), (d), (e)
- Before each shipment of any package, the following requirements apply:
- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
 - (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.
 - (iii) For each package, it is required to ensure that all the requirements specified in the competent authority approval certificates have been satisfied.
 - (iv) For packages containing fissile material, the measurement specified in para. 677(b) of the Regulations and the tests to demonstrate closure of each package as specified in para. 680 of the Regulations are required to be performed where applicable.
 - (v) For packages intended to be used for shipment after storage, it is required to take into account ageing mechanisms.
- 546
- Transport documents with each consignment (consignment notes) are required to include all relevant particulars of the consignment.
- 547–553
- The consignor is required to include a declaration in the transport documents.

- 554, 555 The consignor is required to provide a statement regarding actions to be taken by the carrier.
- 556 The consignor is required to make competent authority certificates available to the carrier(s) before loading and unloading.
- 557 Before the first shipment, the consignor is required to ensure that copies of each competent authority certificate applying to that package design have been submitted to the competent authority of each State through or into which the consignment is to be transported. The consignor is not required to await an acknowledgement from the competent authority, nor is the competent authority required to make an acknowledgement of receiving the certificate.
- 825(c) Shipments — competent authority multilateral approval is required where the CSI is greater than 50.
- 825(d) Radiation protection programmes for shipments by special use vessels.
- 826 Competent authority authorization of transport without shipment approval.
- 827 Information to be included in an application for shipment approval.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

- 573(a)–(c) For transport by rail and by road: for consignments under exclusive use, the radiation level is not allowed to exceed:
- (a) 10 mSv/h at any point on the external surface of any package or overpack, and may only exceed 2 mSv/h provided that:
 - (i) The vehicle is equipped with an enclosure that prevents unauthorized access during transport;
 - (ii) The package or overpack is secured to retain its position within the enclosure during routine transport;
 - (iii) There are no loading or unloading operations between the beginning and the end of the shipment.
 - (b) 2 mSv/h at any point on the outer surfaces of the vehicle, including the upper and lower surfaces, or, in the case of an open vehicle, at any point on the vertical planes projected from the outer edges of the vehicle, on the upper surface of the load, and on the lower external surface of the vehicle.
 - (c) 0.1 mSv/h at any point 2 m from the vertical planes represented by the outer lateral surfaces of the vehicle, or, if the load is transported in an open vehicle, at any point 2 m from the vertical planes projected from the outer edges of the vehicle.
- 574 For transport by road: no persons other than the driver and assistants are permitted in vehicles carrying packages, overpacks or freight containers bearing category II-YELLOW or category III-YELLOW labels.
- 575 For transport by vessels: packages or overpacks having a surface radiation level greater than 2 mSv/h, unless being carried in or on a vehicle under exclusive use in accordance with Table 10 of the Regulations, footnote (a), are not allowed to be transported.

576 For transport by vessels: the transport of consignments by means of a special use vessel is excepted from the requirements of para. 566 of the Regulations relating to TI, CSI and radiation level provided that the conditions stated in para. 576 of the Regulations are met.

579 For transport by air: packages or overpacks having a surface radiation level greater than 2 mSv/h are not allowed to be transported, except under special arrangement.

580, 581 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents.

543, Fig. 6 Large freight containers are required to bear four placards in a vertical orientation on the two external side walls and the two external end walls.

543 Any placards that do not relate to the contents are required to be removed.

543, Figs 2–6 As an alternative to the use of placards on large freight containers, enlarged labels are permitted.

544, Figs 6, 7 Where an exclusive use consignment in a freight container is UN 3333 Type A packages only, and no other UN number commodities are present, the UN number “UN 3333” is required to be displayed on all four sides of the freight container, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background, or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

545 Consignor’s responsibilities.

571, Figs 2–6 The location of placards and the use of placards with reduced dimensions on a road or rail vehicle are stipulated.

572, Figs 6, 7 Where an exclusive use consignment in or on a road or rail vehicle is UN 3333 Type A packages only, and no other UN number commodities are present, the UN number “UN 3333” is required to be displayed, in black digits not less than 65 mm high, either in the lower half of the placard shown in Fig. 6 of the Regulations against the white background or on the placard shown in Fig. 7 of the Regulations. If the placard shown in Fig. 7 of the Regulations is used, it is required to be fixed close to each main placard.

8.3. Stowage during transport, storage in transit and segregation

562 Packages, overpacks and freight containers are required to be segregated during transport and during storage in transit. The criteria for segregation are set out in paras 562(a)–(d) and 506 of the Regulations.

562(a) Criteria for segregation from workers in regularly occupied working areas.

562(b) Criteria for segregation from members of the public.

562(c)	Criteria for segregation from undeveloped photographic film.
562(d), 506	Criteria for segregation from other dangerous goods.
563	Category II-YELLOW or category III-YELLOW packages or overpacks may be carried in compartments occupied by passengers under specific conditions.
564	Consignments are required to be securely stowed.
565	A package or overpack may be carried or stored among packaged general cargo, under certain conditions.
566(a), Table 10	TI limits for freight containers and conveyances.
566(b)	Limits on the radiation levels from freight containers and conveyances. See para. 573(b) and (c) of the Regulations for exceptions.
566(c), Table 11	CSI limits for freight containers and conveyances.
567	Any package or overpack having a TI greater than 10, or any consignment having a CSI greater than 50, is required to be transported only under exclusive use.
568, 569, Table 11	Segregation of packages during transport and storage in transit.
576	For a special use vessel, the storage arrangements are excepted from the requirements of para. 566 of the Regulations provided that the conditions stated in para. 576 of the Regulations are met.
	8.4. Damaged or leaking packages
510	Actions to be taken when a package has been damaged or is leaking, or where it is suspected that the package may have leaked or been damaged.
511	Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.
	8.5. Decontamination
512	Periodic checking of conveyances and equipment is required to determine the level of contamination.
513	Decontamination of conveyances, equipment or parts thereof that have become contaminated.
	8.6. Other provisions
309	In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
582	Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.

Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

SCHEDULE FOR UN 3507

URANIUM HEXAFLUORIDE, RADIOACTIVE MATERIAL, EXCEPTED PACKAGE, less than 0.1 kg per package, non-fissile or fissile-excepted

Paragraph(s) of the Regulations [1]	Subject
1. GENERAL PROVISIONS	
110, 507	Uranium hexafluoride has corrosive properties (Class 8) and these are required to be taken into account during transport.
301–303	General provisions for radiation protection.
304, 305, 554(c)	Emergency response.
306	Management system.
311–315	Training.
419(c)	Classification as uranium hexafluoride.
502, 503	Requirements before each shipment.
515	Requirements — general. If the excepted package contains fissile material, one of the fissile exceptions provided by para. 417 is required to be applied. Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.
607–618	Design requirements for the packaging and the package.
619–621	Additional design requirements — air transport.
636	Minimum dimensions of a package containing fissile excepted material.
801	The consignor is required to demonstrate on request that the package design complies with all applicable competent authority requirements.
819	Transitional arrangements for packages designed under the provisions of the 1985 or 1985 (As Amended 1990), 1996 Edition, 1996 Edition (Revised), 1996 (As Amended 2003), 2005, 2009 and 2012 Editions of the Regulations.
2. CONTENTS LIMITS FOR PACKAGES	

417	<p>If the package contains fissile material, one of the fissile exceptions provided by para. 417 of the Regulations is required to be applied.</p> <p>Fissile material excepted under para. 417(f) is required to comply with para. 606 and requires multilateral approval by the competent authority in each State.</p>
420	Contents of a package containing uranium hexafluoride.
422(e), Table 4	The activity limits in Table 4 of the Regulations are required to be met.
425	Additional requirements for classification under UN 3507.
	3. CONTAMINATION
508	<p>Non-fixed contamination on the external surfaces of any package is required to be kept as low as practicable and is not allowed to exceed the following limits, averaged over any area of 300 cm² of any part of the surface:</p> <p>(a) Beta, gamma and low toxicity alpha emitters, 4 Bq/cm²;</p> <p>(b) All other alpha emitters, 0.4 Bq/cm².</p>
	4. MAXIMUM RADIATION LEVELS
516	The radiation level at any point on the external surface of an excepted package is not allowed to exceed 5 µSv/h.
	5. CATEGORIES OF PACKAGES AND OVERPACKS
	Not applicable.
	6. MARKING AND LABELLING
424(b)	The package is required to be marked "RADIOACTIVE" on an internal surface in such a manner that a warning of the presence of radioactive material is visible on opening the package; or on the outside of the package, when it is impractical to mark an internal surface.
507	Packages, freight containers and overpacks containing materials having other dangerous properties (e.g. corrosiveness) are also required to be marked and labelled as required by the relevant transport regulations.
531	Each package is required to be marked with an identification of either the consignor or the consignee, or both.
531–533	All package markings are required to be legible and durable, and are required to be on the outside of the packaging.
532	Packages are required to bear the mark "UN 3507".

533 Packages with a gross mass exceeding 50 kg are required to be marked with their permissible gross mass on the outside of the packaging.

545 It is the consignor's responsibility to comply with the requirements of marking, labelling and placarding.

7. REQUIREMENTS BEFORE SHIPMENT

502, 503(a) Before each shipment of any package, the following requirements apply:

- (i) For any package, it is required to ensure that all the requirements specified in the relevant provisions of the Regulations have been satisfied.
- (ii) It is required to ensure that lifting attachments that do not meet the requirements of para. 608 of the Regulations have been removed or otherwise rendered incapable of being used for lifting the package, in accordance with para. 609 of the Regulations.

546(a) The transport documents with each consignment (consignment notes) are required to include the identification of the consignor and consignee, including their names and addresses, and the UN number UN 3507.

8. PROVISIONS CONCERNING TRANSPORT OPERATIONS

8.1. Modal requirements

580 Transport by post is not permitted.

8.2. Placarding

507 Placards may be required for other dangerous properties of the contents, but not for the radioactive properties.

545 Consignor's responsibilities.

8.3. Stowage during transport, storage in transit and segregation

Not applicable.

8.4. Damaged or leaking packages

511 Movement of packages that are damaged or leaking radioactive contents in excess of allowable limits for normal conditions of transport.

8.5. Decontamination

Not applicable.

8.6. Other provisions

- 309 In the event of non-compliance, appropriate actions are required to be taken as soon as possible, including communication and remedy.
- 582 Customs operations may be carried out only in a place where adequate means of controlling radiation exposure are provided.
- 583 Where a consignment is undeliverable, appropriate actions are required to be taken as soon as possible.

DRAFT

REFERENCE

- [1] INTERNATIONAL ATOMIC ENERGY AGENCY, Regulations for the Safe Transport of Radioactive Material, 2018 Edition, IAEA Safety Standards Series No. SSR-6 (Rev. 1), IAEA, Vienna (2018).

DRAFT

CONTRIBUTORS TO DRAFTING AND REVIEW

DRAFT